

Slim Straight A to Low Profile Angle Micro-B Cables-M/M

• Passive: 0.5m / 1m / 2m / 3m

• Active: 4m / 5m / 6m / ... / 20m (repeater size: 42(L) x 10(W) x 9(T)mm)

- **Slim A Plug**
- **Space-saving Micro-B Plug** (without or with locking screws)
- **Thin & Flexible Cable** (O.D.: 4.3mm, USB 2.0 + USB 3.0)
- **Tiny repeater for Active Cable** (42(L) x 10(W) x 9(T) in mm)
- **USB 3.0 bus-powered** (no external power supply needed)

Slim Straight A Plug



thin!
6.5mm


short!
31.5mm

15.8mm
narrow!

support High Speed & High Resolution USB3 Machine Vision Cameras without lost frames all the time.

high frame rate 170 fps at full 2.0~2.3 MP resolution, high frame rate 121 fps at full 3.2 MP resolution, high frame rate 90 fps at full 4.0~4.2 MP resolution, high frame rate 75 fps at full 5 MP resolution, high frame rate 30 fps at full 12 MP resolution, high frame rate 21 fps at full 18 MP resolution (500 MB/s wide bandwidth data throughput)

Low Profile Left Angle Micro-B Plug

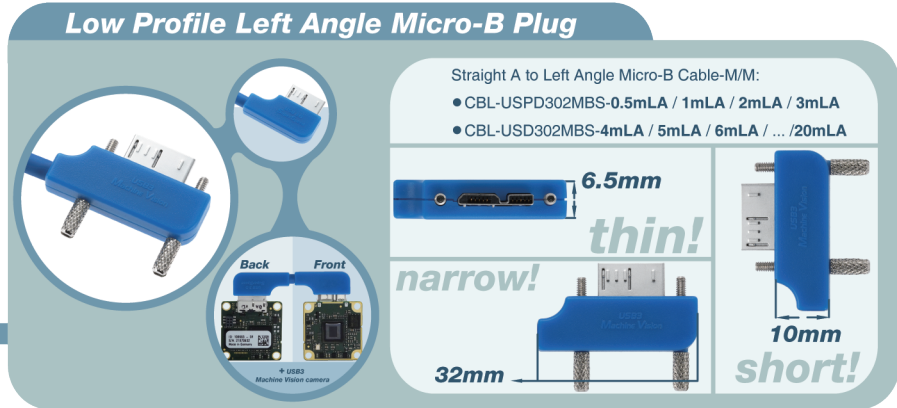


Straight A to Left Angle Micro-B Cable-M/M:
 • CBL-USPD302MBS-0.5mLA / 1mLA / 2mLA / 3mLA
 • CBL-USPD302MBS-4mLA / 5mLA / 6mLA / ... /20mLA

6.5mm
thin!

narrow!
32mm

10mm
short!

Low Profile Right Angle Micro-B Plug

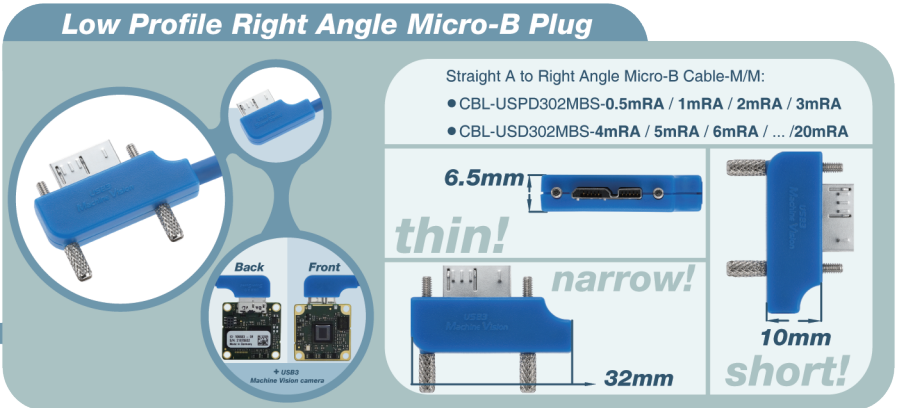


Straight A to Right Angle Micro-B Cable-M/M:
 • CBL-USPD302MBS-0.5mRA / 1mRA / 2mRA / 3mRA
 • CBL-USPD302MBS-4mRA / 5mRA / 6mRA / ... /20mRA

6.5mm
thin!

narrow!
32mm

10mm
short!

Low Profile Up Angle Micro-B Plug

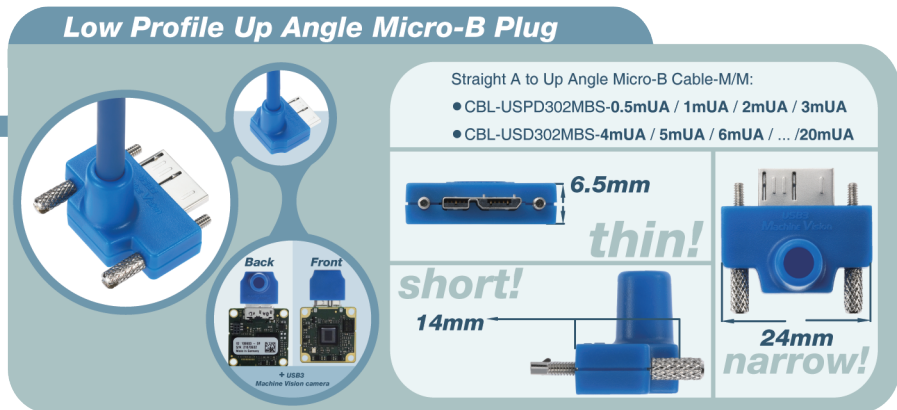


Straight A to Up Angle Micro-B Cable-M/M:
 • CBL-USPD302MBS-0.5mUA / 1mUA / 2mUA / 3mUA
 • CBL-USPD302MBS-4mUA / 5mUA / 6mUA / ... /20mUA

6.5mm
thin!

short!
14mm

24mm
narrow!

Low Profile Down Angle Micro-B Plug

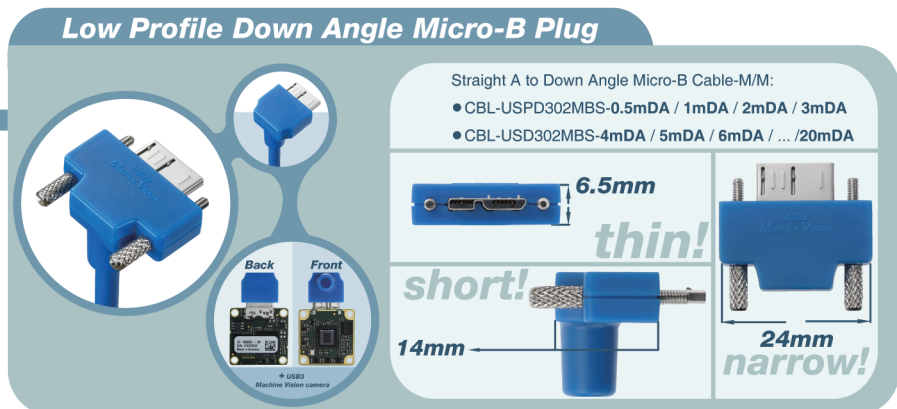

Straight A to Down Angle Micro-B Cable-M/M:
 • CBL-USPD302MBS-0.5mDA / 1mDA / 2mDA / 3mDA
 • CBL-USPD302MBS-4mDA / 5mDA / 6mDA / ... /20mDA

6.5mm
thin!

short!
14mm

24mm
narrow!

Fit for



•Basler



•IDS



•JAI



•Matrix Vision



•Point Grey



•SENTECH



•SVS-VISTEK



•The Imaging Source



•Toshiba Teli



•XIMEA

Slim Straight A to Low Profile Angle Micro-B Cables-M/M

• Passive: 0.5m / 1m / 2m / 3m

• Active: 4m / 5m / 6m / ... / 20m (repeater size: 42(L) x 10(W) x 9(T)mm)

- **Slim A Plug**
- **Space-saving Micro-B Plug** (without or with locking screws)
- **Thin & Flexible Cable** (O.D.: 4.3mm, USB 2.0 + USB 3.0)
- **Tiny repeater for Active Cable** (42(L) x 10(W) x 9(T) in mm)
- **USB 3.0 bus-powered** (no external power supply needed)

Slim Straight A Plug




thin!
6.5mm


short!
31.5mm

15.8mm narrow!

support High Speed & High Resolution USB3 Machine Vision Cameras without lost frames all the time.

high frame rate 170 fps at full 2.0~2.3 MP resolution, high frame rate 121 fps at full 3.2 MP resolution, high frame rate 90 fps at full 4.0~4.2 MP resolution, high frame rate 75 fps at full 5 MP resolution, high frame rate 30 fps at full 12 MP resolution, high frame rate 21 fps at full 18 MP resolution (500 MB/s wide bandwidth data throughput)

Low Profile Left Angle Micro-B Plug

Straight A to Left Angle Micro-B Cable-M/M:

- CBL-USPD302MB-0.5mLA / 1mLA / 2mLA / 3mLA
- CBL-USPD302MB-4mLA / 5mLA / 6mLA / ... / 20mLA

6.5mm thin!



24mm narrow!

10mm short!

Back Front

USB3 Machine Vision camera

Low Profile Right Angle Micro-B Plug

Straight A to Right Angle Micro-B Cable-M/M:

- CBL-USPD302MB-0.5mRA / 1mRA / 2mRA / 3mRA
- CBL-USPD302MB-4mRA / 5mRA / 6mRA / ... / 20mRA

6.5mm thin!



24mm narrow!

10mm short!

Back Front

USB3 Machine Vision camera

Low Profile Up Angle Micro-B Plug

Straight A to Up Angle Micro-B Cable-M/M:

- CBL-USPD302MB-0.5mUA / 1mUA / 2mUA / 3mUA
- CBL-USPD302MB-4mUA / 5mUA / 6mUA / ... / 20mUA

6.5mm thin!



14mm short!

16.5mm narrow!

Back Front

USB3 Machine Vision camera

Low Profile Down Angle Micro-B Plug

Straight A to Down Angle Micro-B Cable-M/M:

- CBL-USPD302MB-0.5mDA / 1mDA / 2mDA / 3mDA
- CBL-USPD302MB-4mDA / 5mDA / 6mDA / ... / 20mDA

6.5mm thin!

14mm short!

16.5mm narrow!

Back Front

USB3 Machine Vision camera

Fit for



•Basler



•IDS



•JAI



•Matrix Vision



•Point Grey



•SENTECH



•SVS-VISTEK



•The Imaging Source



•Toshiba Teli



•XIMEA