

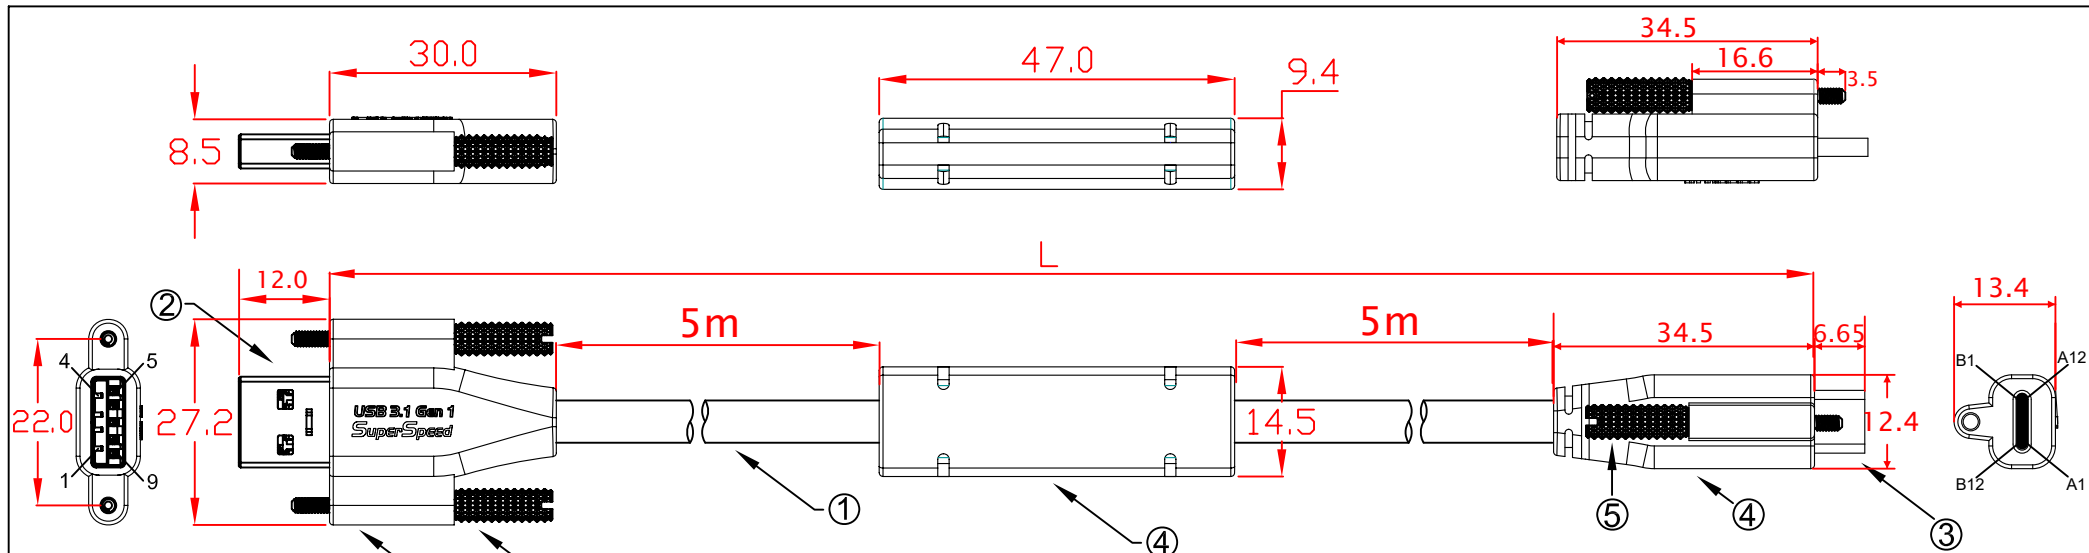


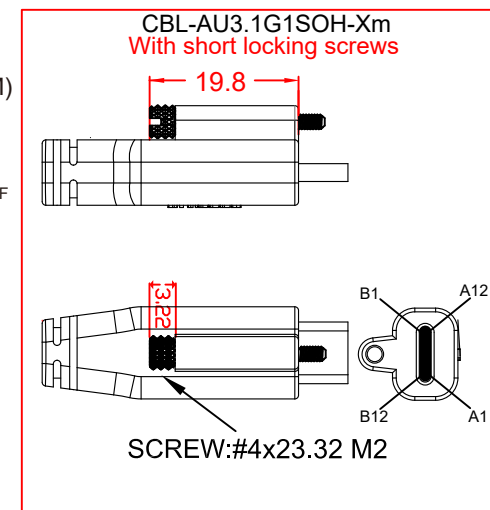


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)

L:
 CBL-AU3.1G1SO-5m 5000mm±30mm
 CBL-AU3.1G1SO-7m 7000mm±30mm
 CBL-AU3.1G1SO-10m 10000mm±30mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2

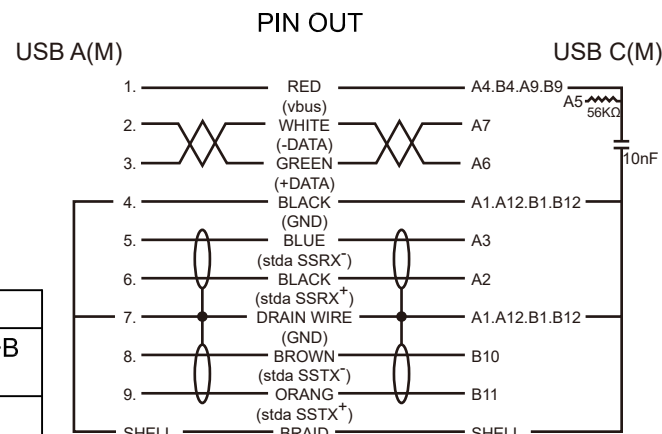



Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SO-Xm				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0

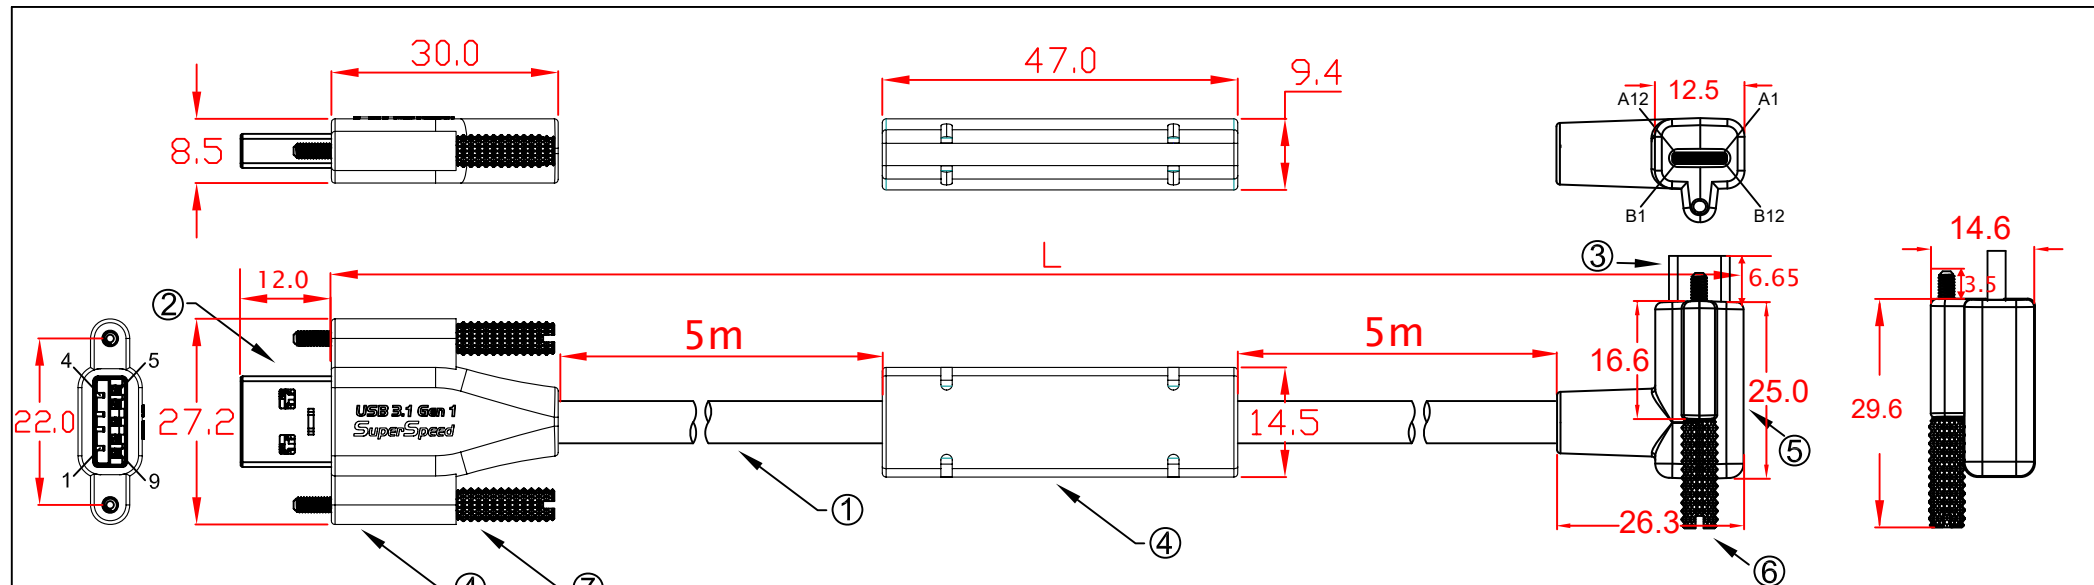


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)

L:
 CBL-AU3.1G1SO-5mLA 5000mm±30mm
 CBL-AU3.1G1SO-7mLA 7000mm±30mm
 CBL-AU3.1G1SO-10mLA 10000mm±30mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS ASSEMBLY HOUSING, BLACK COLOR
6.	SCREW:#4x33 M2
7.	SCREW:#4x34.5 M2

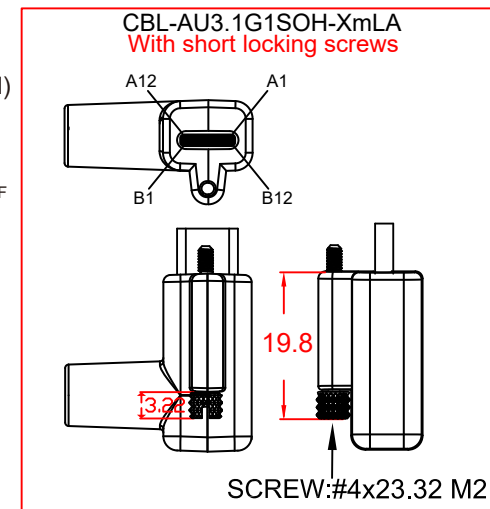
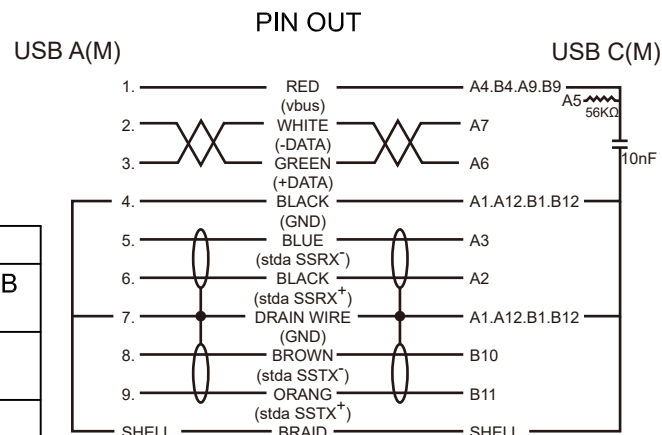


Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SO-XmLA				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0

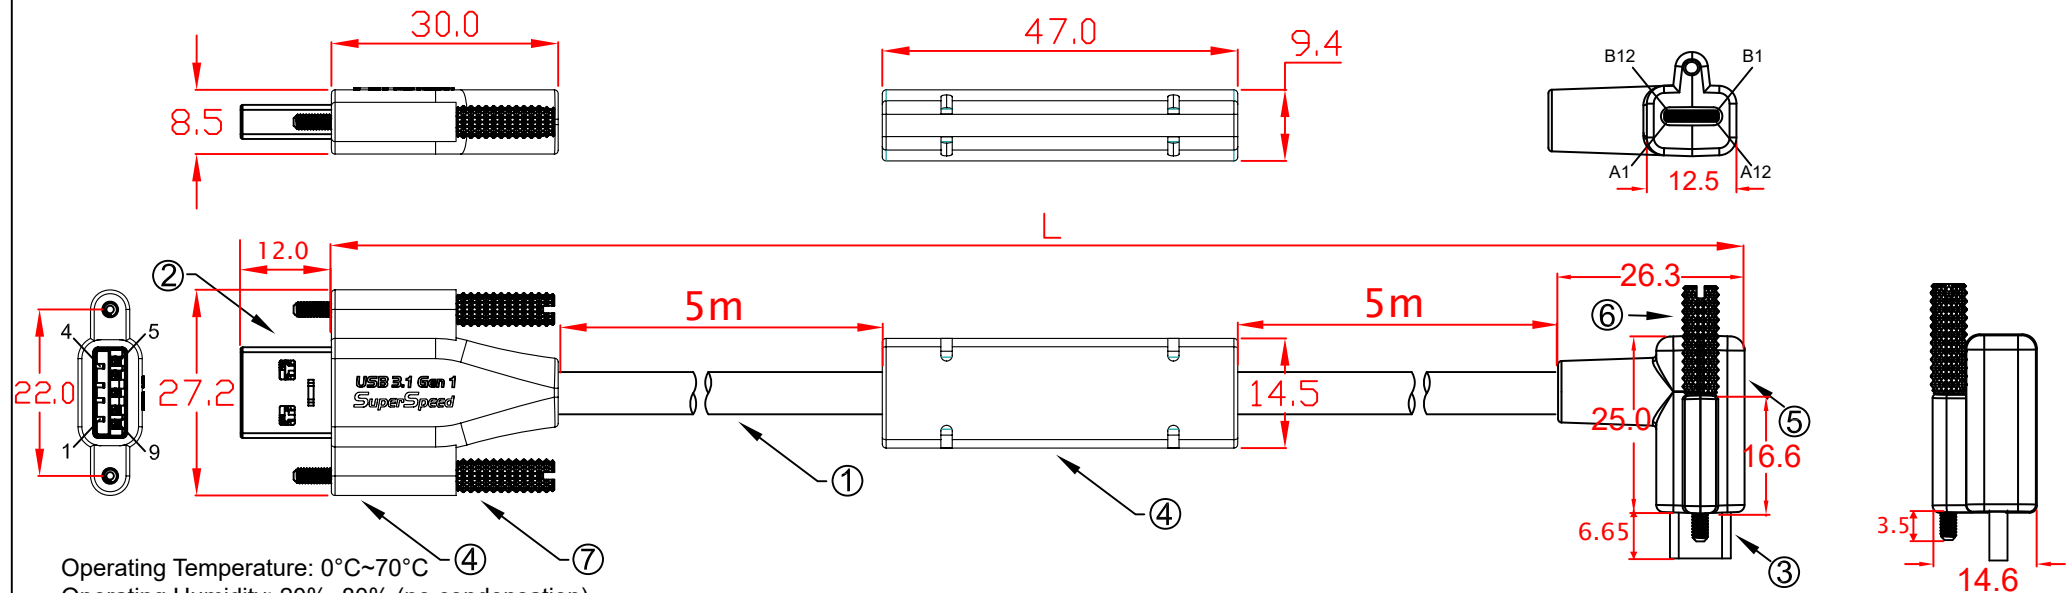


L:
 CBL-AU3.1G1SO-5mRA 5000mm±30mm
 CBL-AU3.1G1SO-7mRA 7000mm±30mm
 CBL-AU3.1G1SO-10mRA 10000mm±30mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS ASSEMBLY HOUSING, BLACK COLOR
6.	SCREW:#4x33 M2
7.	SCREW:#4x34.5 M2

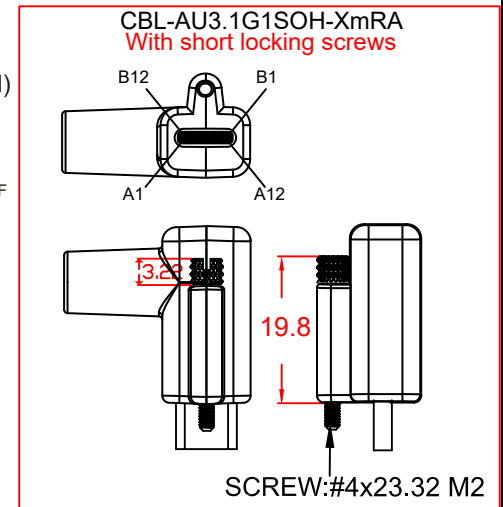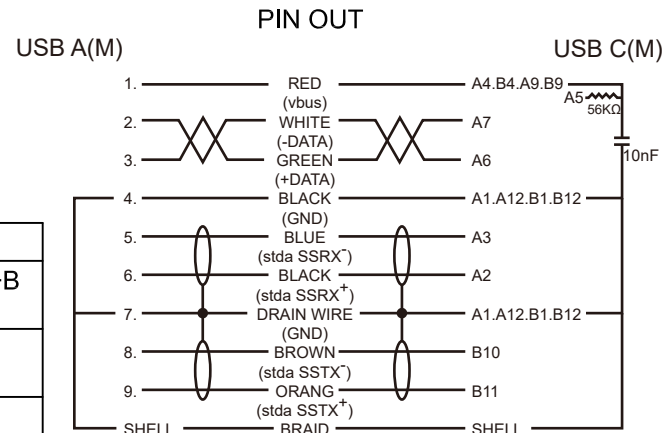

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SO-XmRA				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0



Mobile Computing JARGY

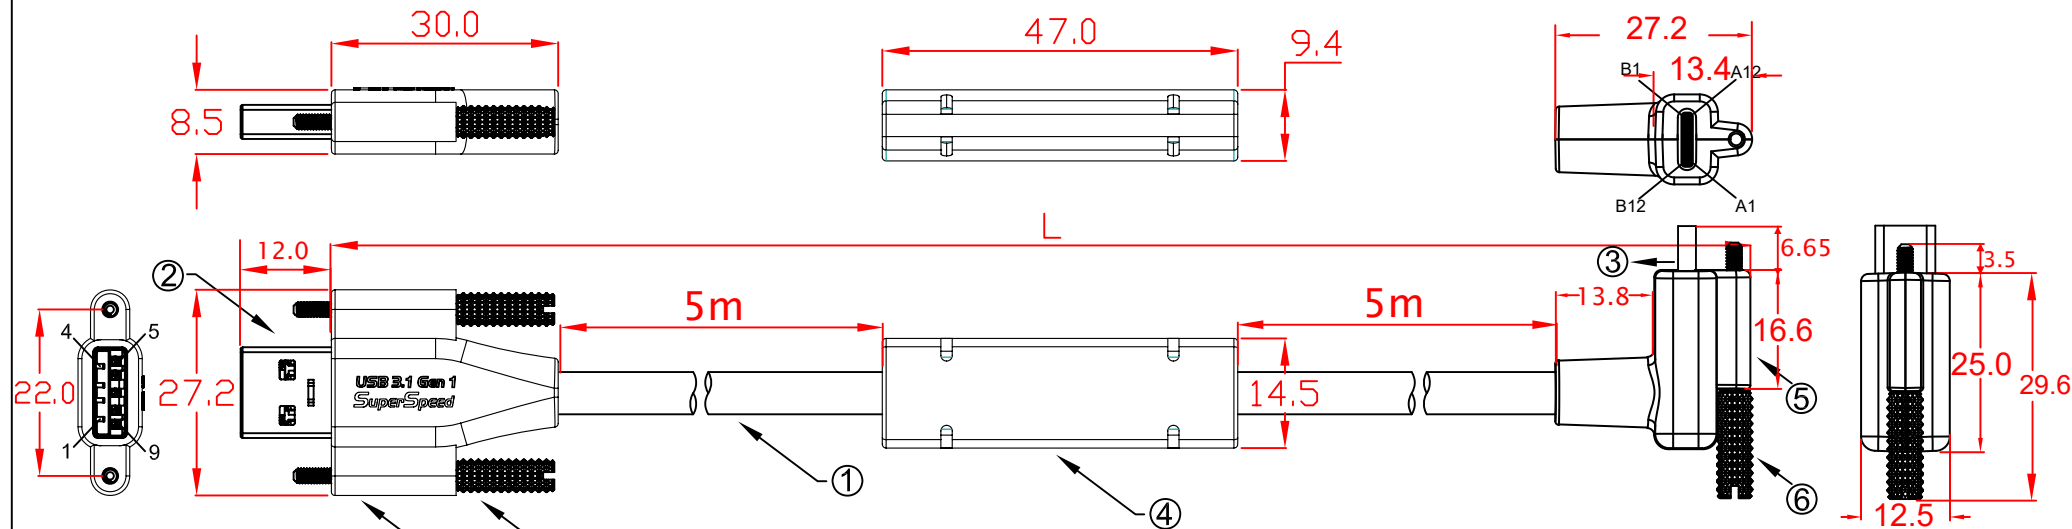


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)


L:
 CBL-AU3.1G1SO-5mDA 5000mm±30mm
 CBL-AU3.1G1SO-7mDA 7000mm±30mm
 CBL-AU3.1G1SO-10mDA 10000mm±30mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS ASSEMBLY HOUSING, BLACK COLOR
6.	SCREW:#4x33 M2
7.	SCREW:#4x34.5 M2

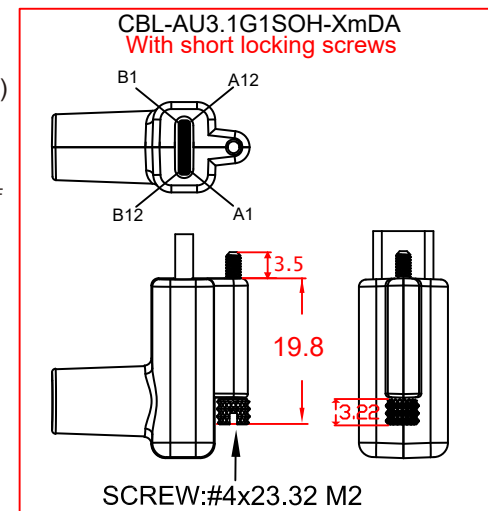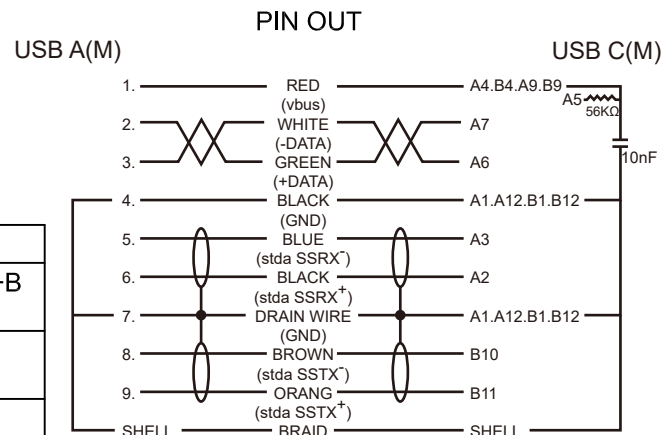

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SO-XmDA				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0



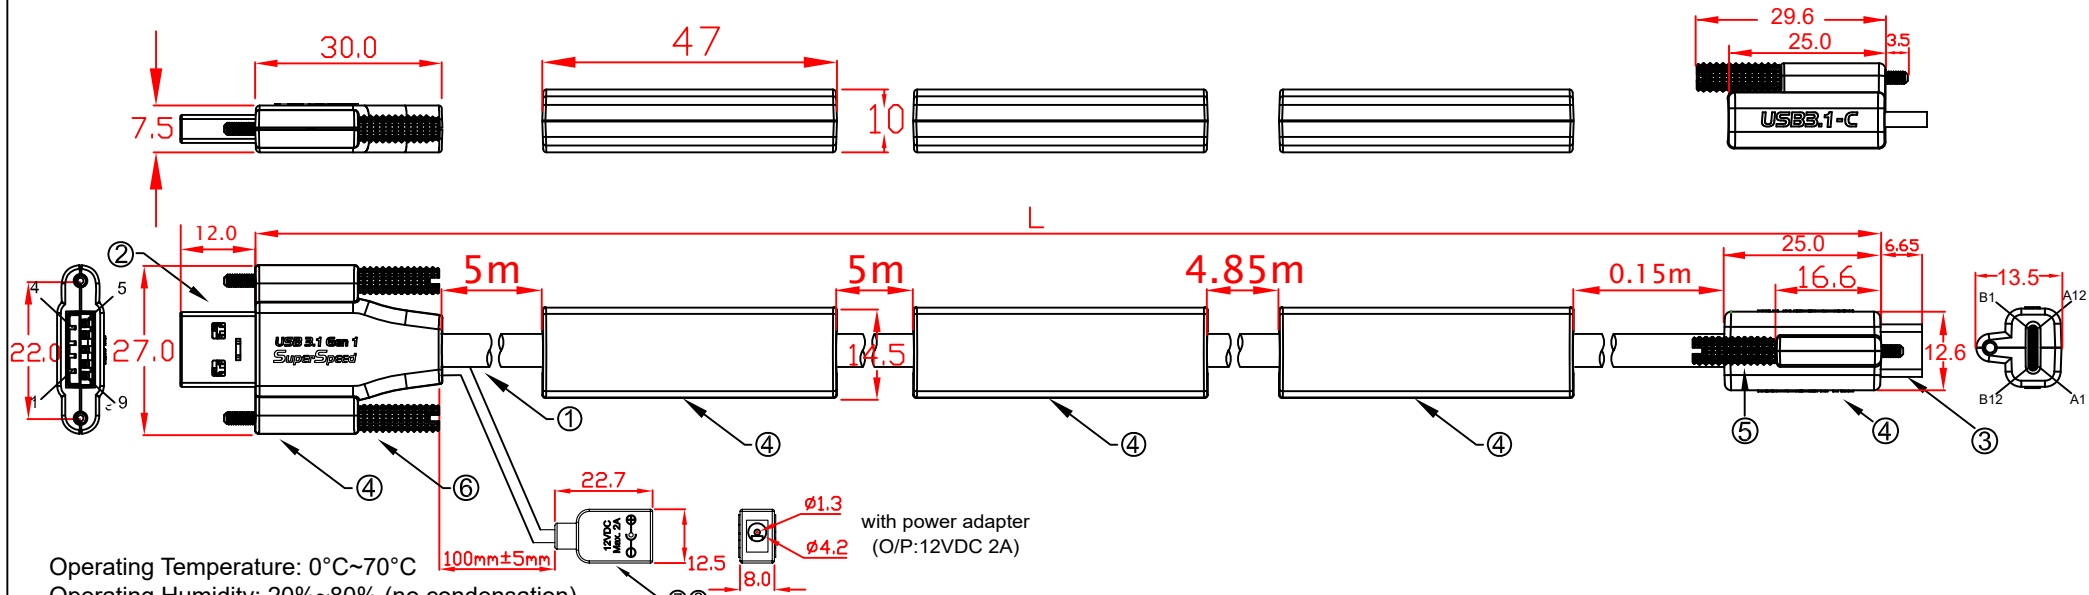


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)

L:
 CBL-AU3.1G1SOPW-15m 15000mm±50mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	ABS HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	PVC MOLDED HOUSING, BLACK COLOR


PIN OUT

USB A(M)

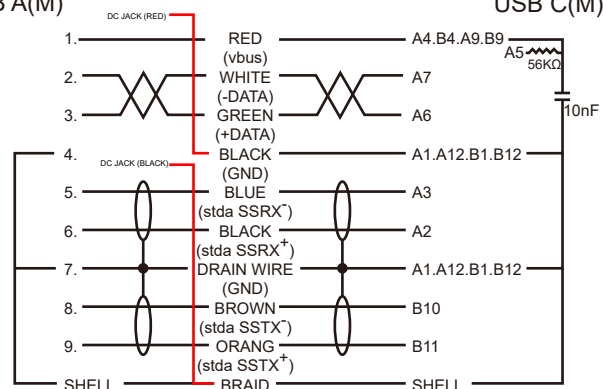


USB C(M)

CBL-AU3.1G1SOHPW-Xm With short locking screws

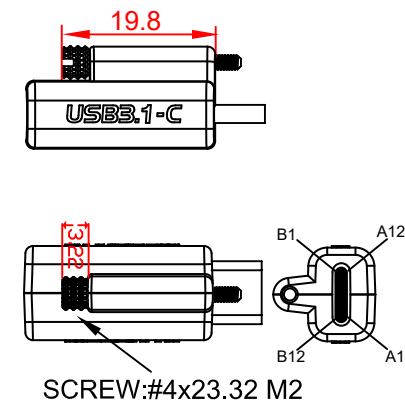


SCREW:#4x23.32 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-15m				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0



Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-15mLA				mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0
				

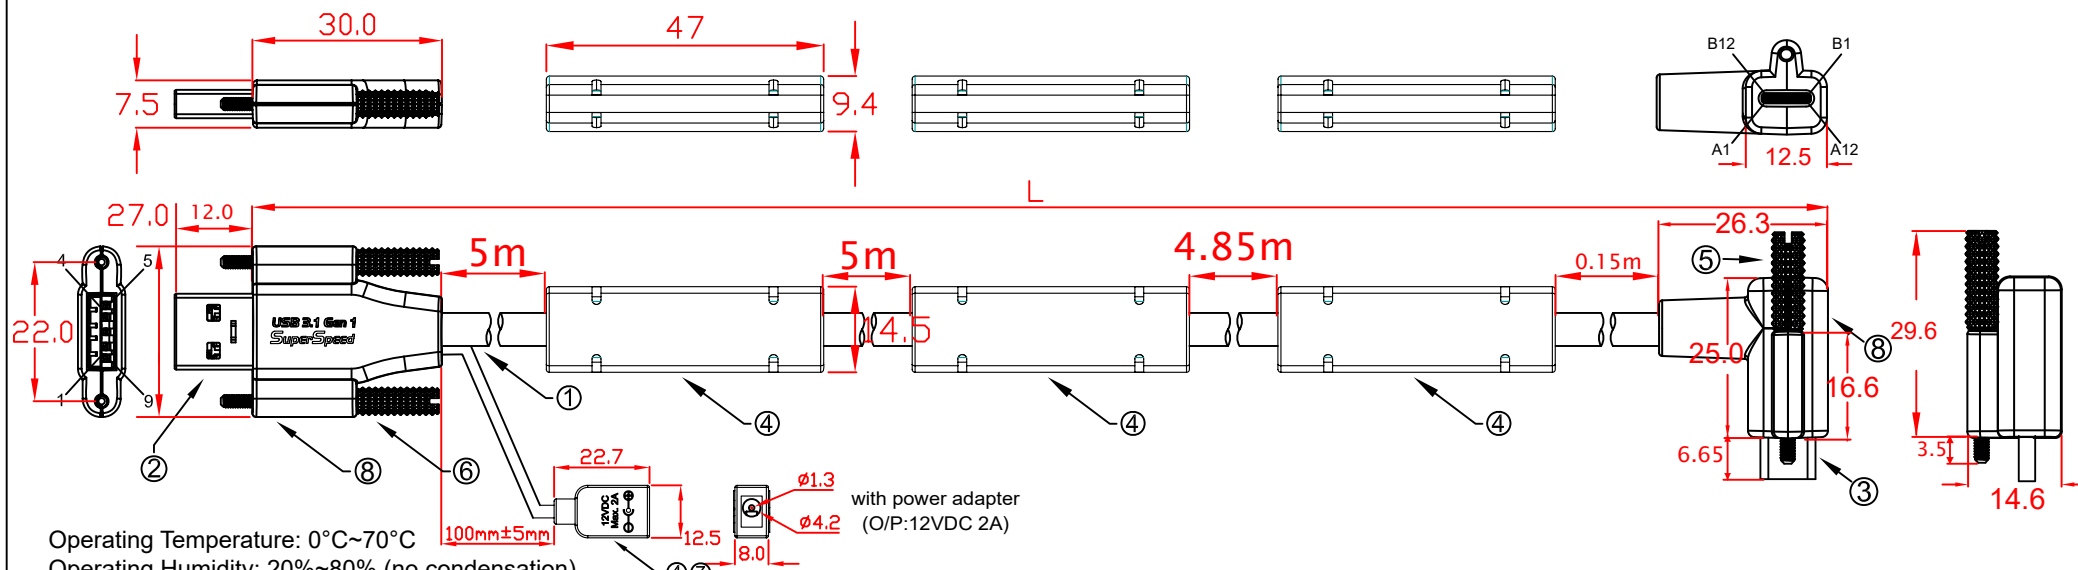


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)


L:
 CBL-AU3.1G1SOPW-15mRA 15000mm±50mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	ABS HOUSING, BLACK COLOR


PIN OUT

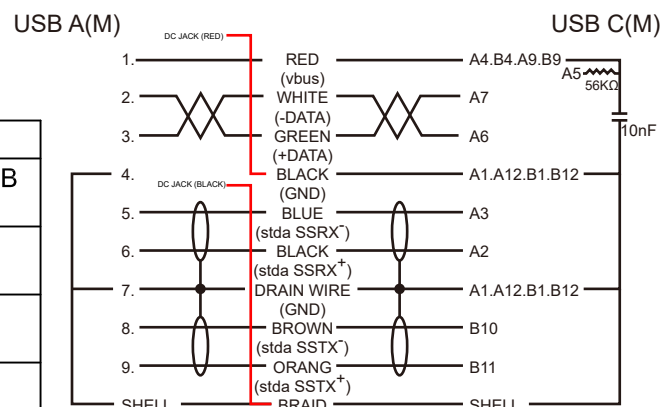

CBL-AU3.1G1SOHPW-XmRA With short locking screws

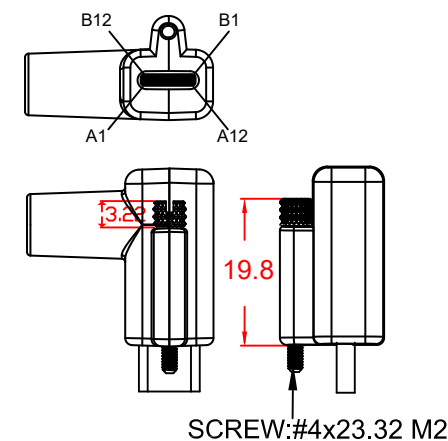

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-15mRA				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0

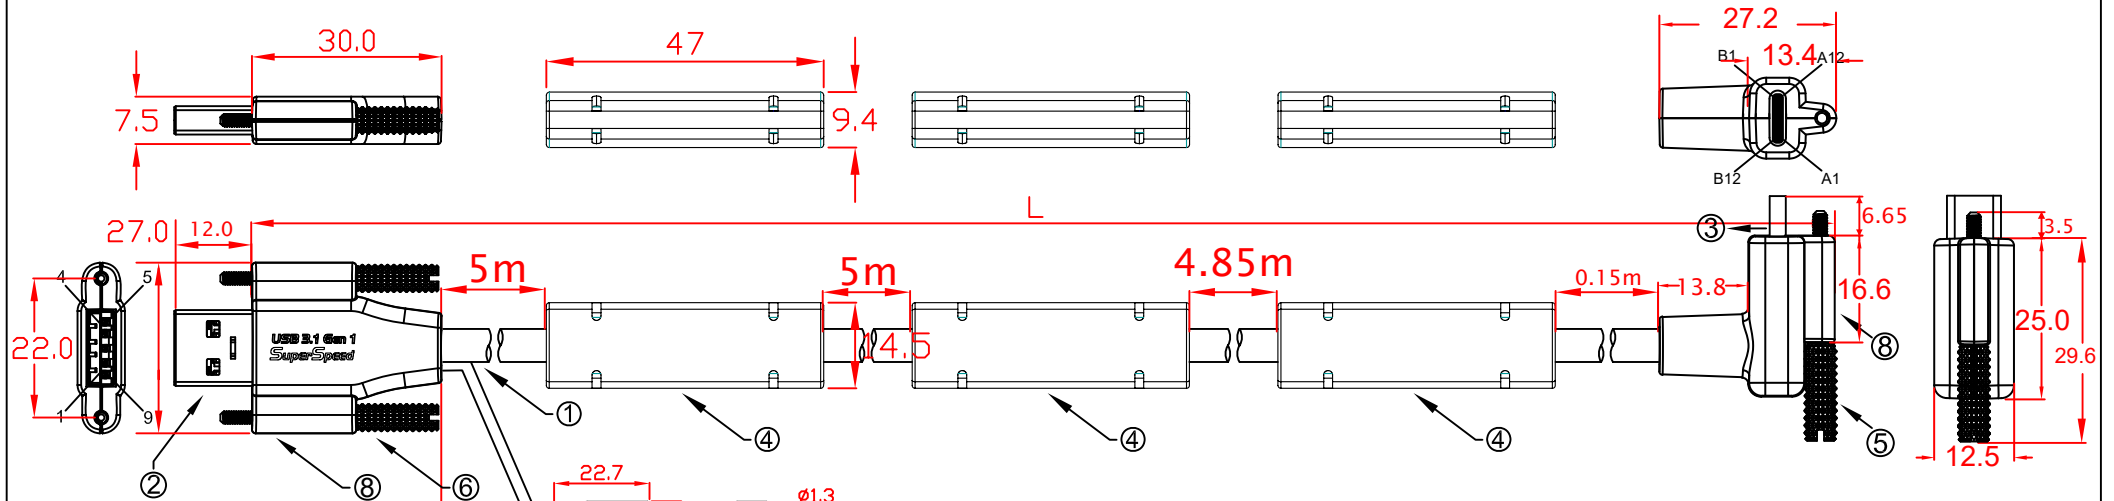


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)

L:
 CBL-AU3.1G1SOPW-15mDA 15000mm±50mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	ABS HOUSING, BLACK COLOR


PIN OUT

USB A(M)

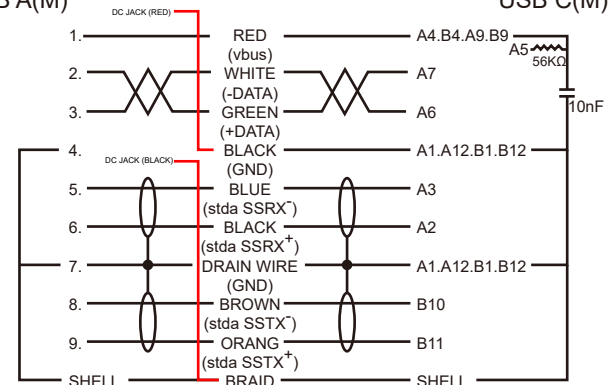


USB C(M)

CBL-AU3.1G1SOHPW-XmDA With short locking screws

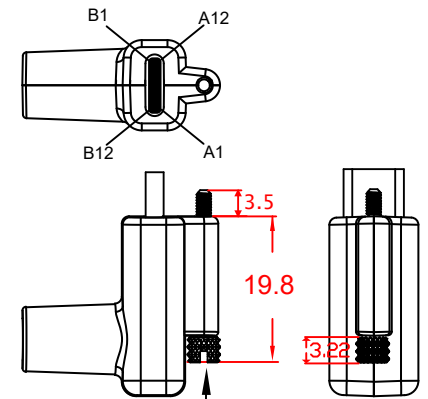

SCREW:#4x23.32 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-15mDA				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M				1.0

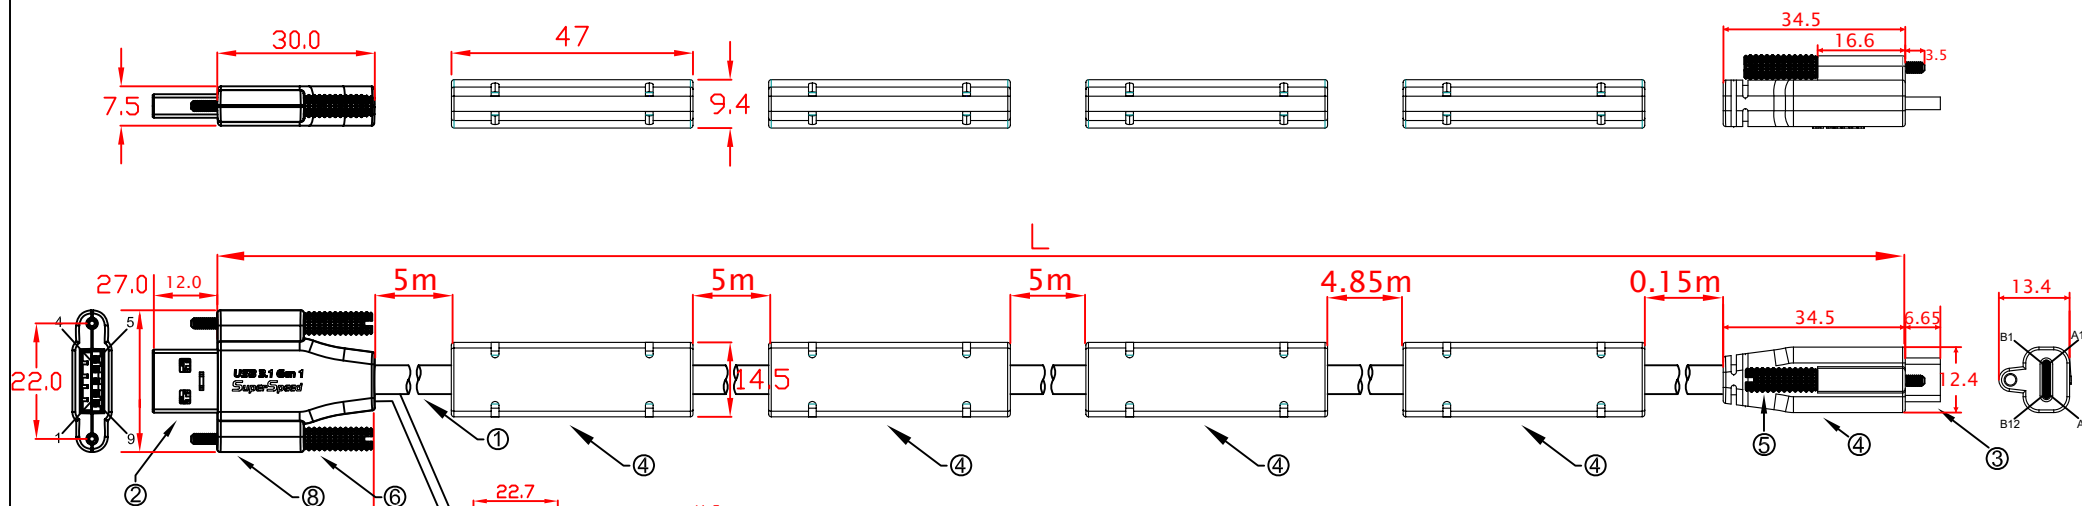

Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)


L:

CBL-AU3.1G1SOPW-20m 20000mm±50mm


with power adapter
 (O/P:12VDC 2A)

PIN OUT

USB A(M)

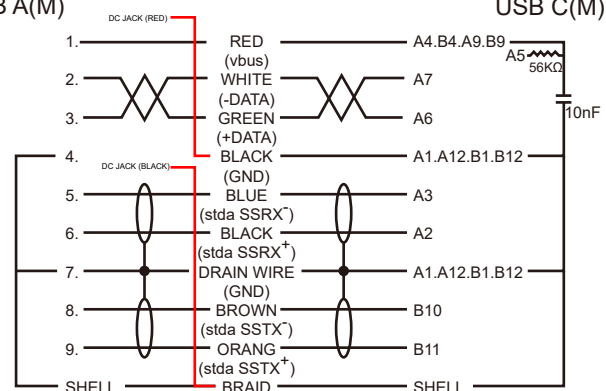



CBL-AU3.1G1SOHPW-Xm
 With short locking screws

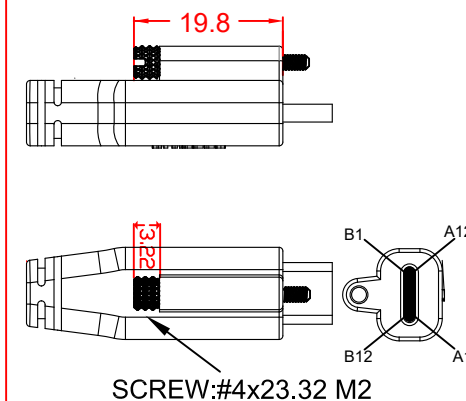

SCREW:#4x23.32 M2

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	ABS HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-20m				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M			1.0	

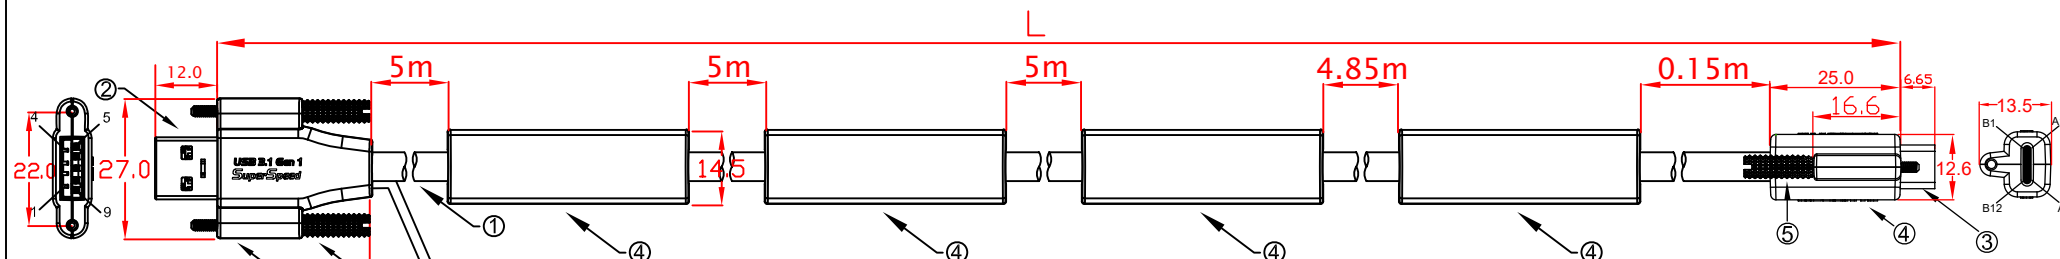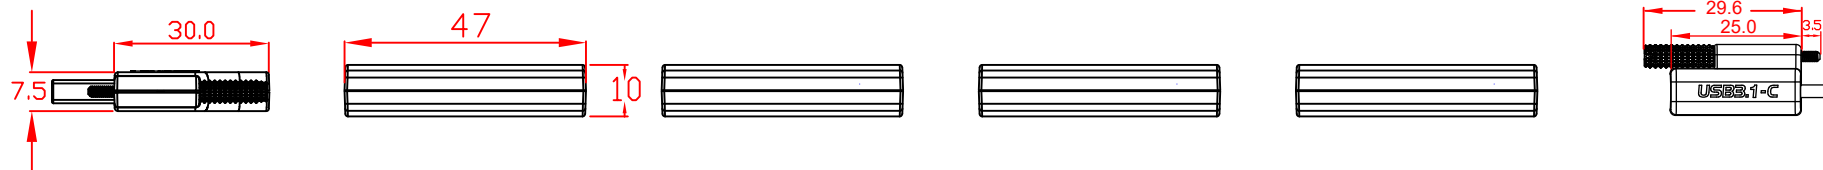

Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)


L:

CBL-AU3.1G1SOPW-20m 20000mm±50mm



with power adapter
 (O/P:12VDC 2A)

PIN OUT

USB A(M)

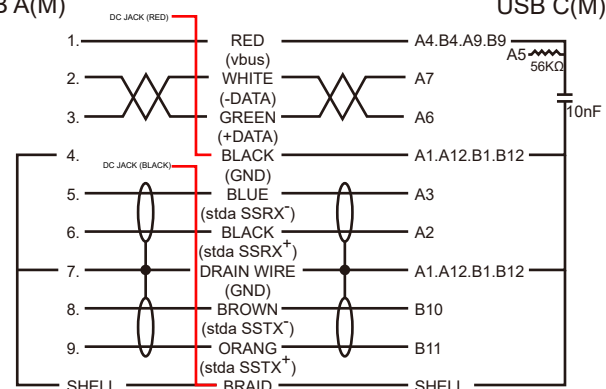


CBL-AU3.1G1SOHPW-Xm
 With short locking screws

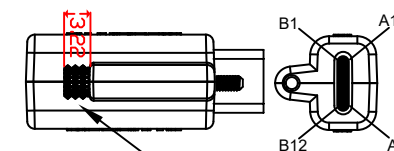

SCREW:#4x23.32 M2

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	ABS HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	PVC MOLDED HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-20m				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M			1.0	

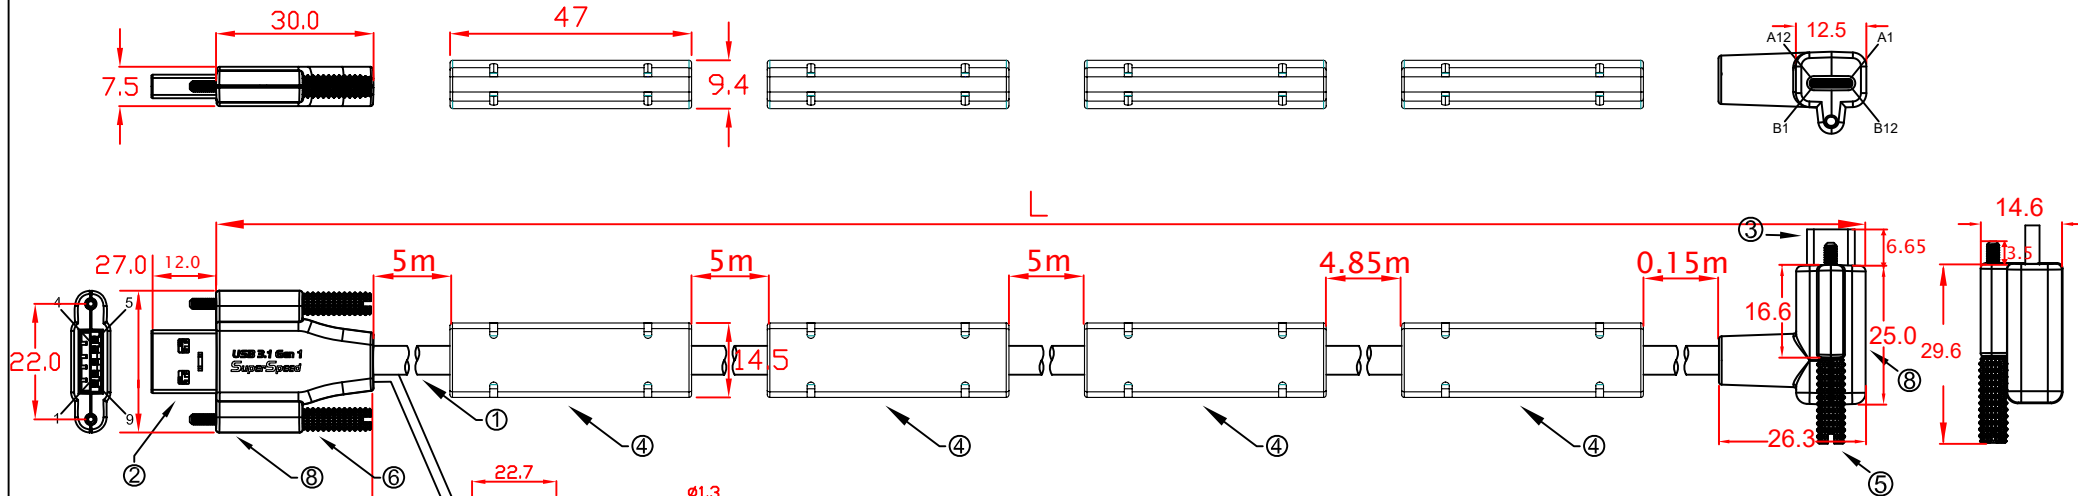


Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)

L:
 CBL-AU3.1G1SOPW-20mLA 20000mm±50mm


with power adapter
 (O/P: 12VDC 2A)

PIN OUT

USB A(M)

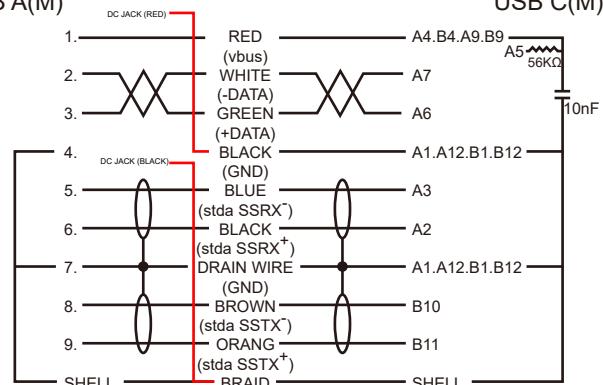


CBL-AU3.1G1SOHPW-XmLA
 With short locking screws

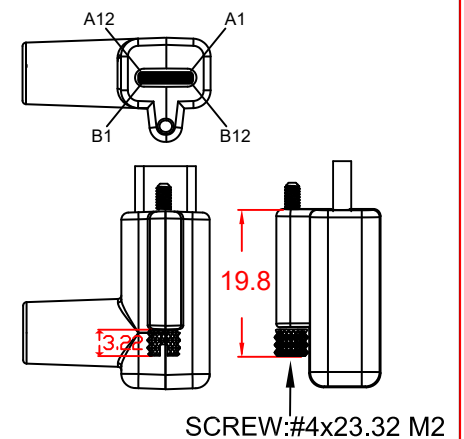

SCREW:#4x23.32 M2

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	ABS HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-20mLA				mm
Drawing Name	Drawn	Date	REV.	
USB 3.1 GEN 1 A to C M/M			1.0	

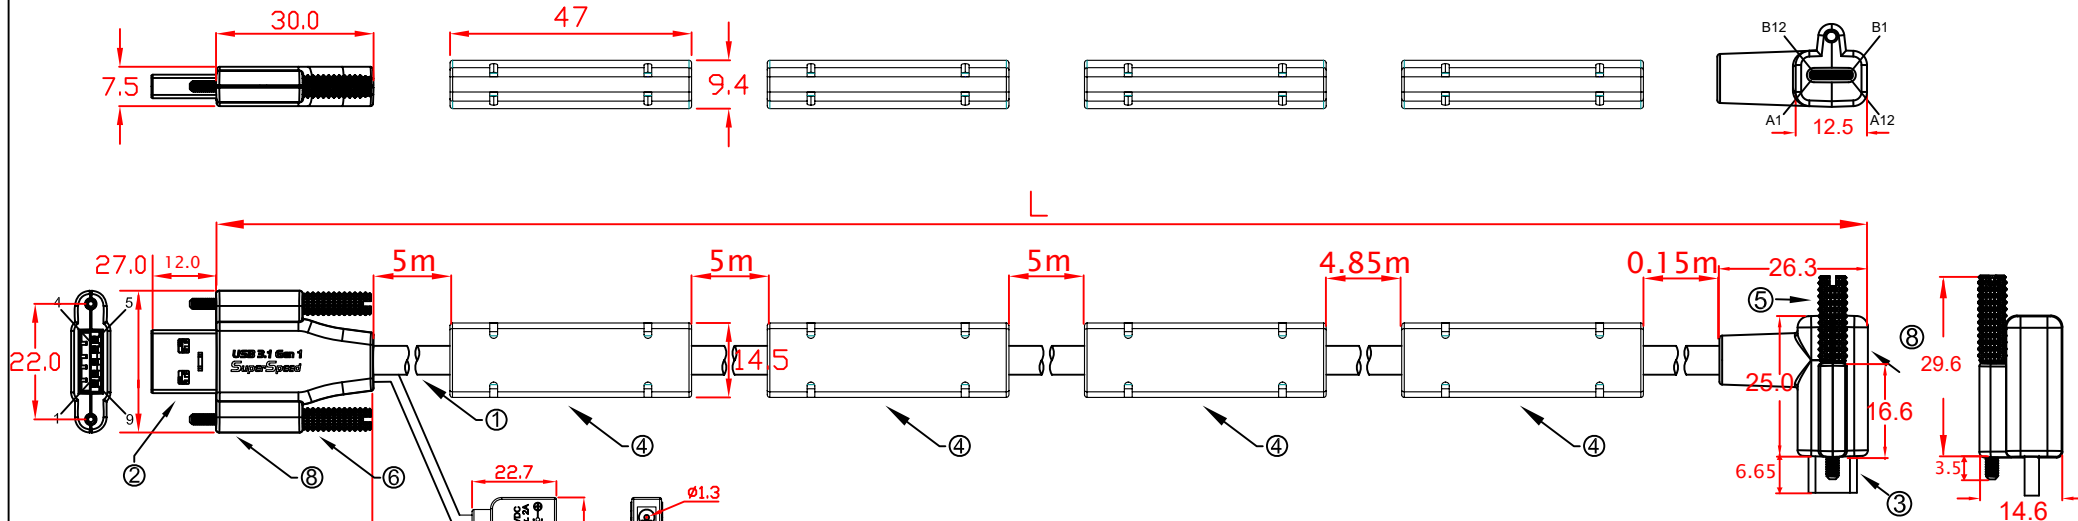

Operating Temperature: 0°C~70°C
 Operating Humidity: 20%~80% (no condensation)
 Storage Temperature: -25°C~85°C
 Storage Humidity: 20%~80% (no condensation)


L:

CBL-AU3.1G1SOPW-20mRA 20000mm±50mm


with power adapter
 (O/P:12VDC 2A)

PIN OUT


USB A(M)

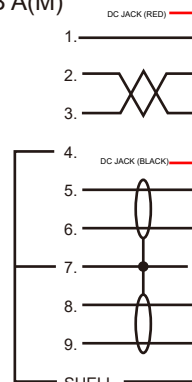

USB C(M)

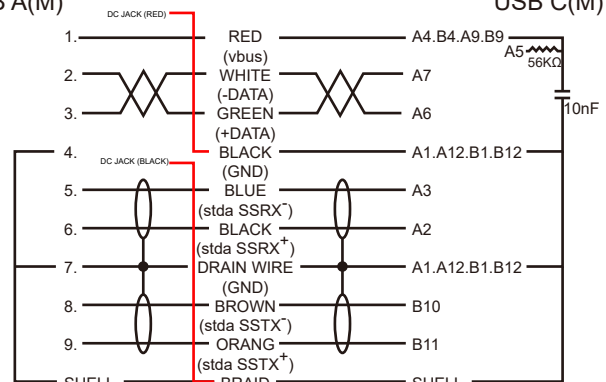

CBL-AU3.1G1SOHPW-XmRA
 With short locking screws

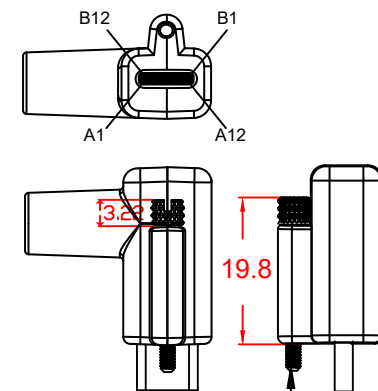

SCREW:#4x23.32 M2

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2
7.	DC JACK 1.3mm 30V 0.3V
8.	ABS HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-AU3.1G1SOPW-20mRA				mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

