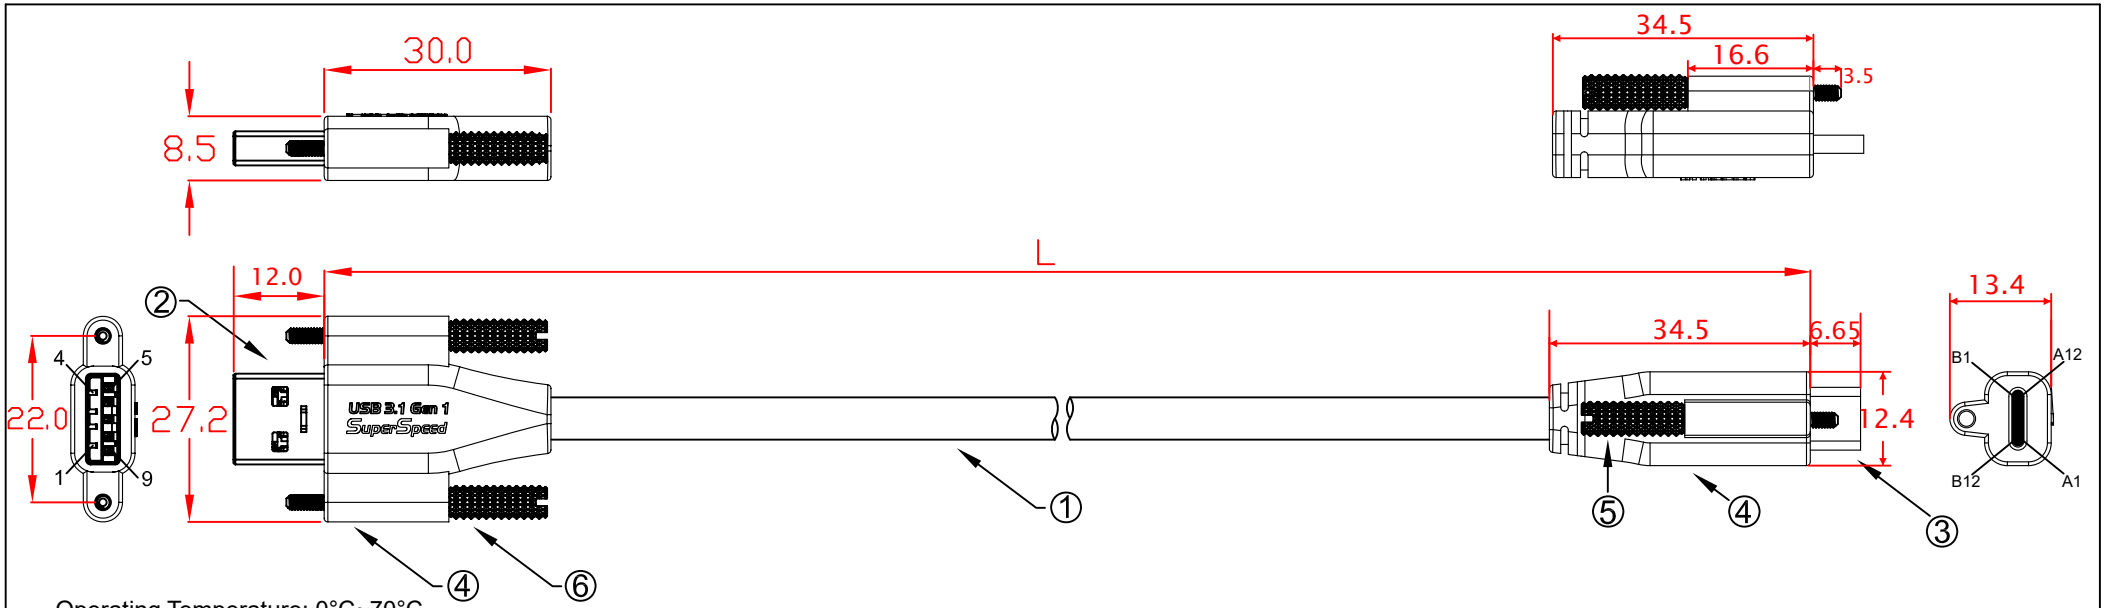

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

L:

CBL-PU3.1G1SO-1m	1000mm±10mm
CBL-PU3.1G1SO-2m	2000mm±20mm
CBL-PU3.1G1SO-3m	3000mm±20mm
CBL-PU3.1G1SO-4m	4000mm±30mm
CBL-PU3.1G1SO-5m	5000mm±30mm

PIN OUT

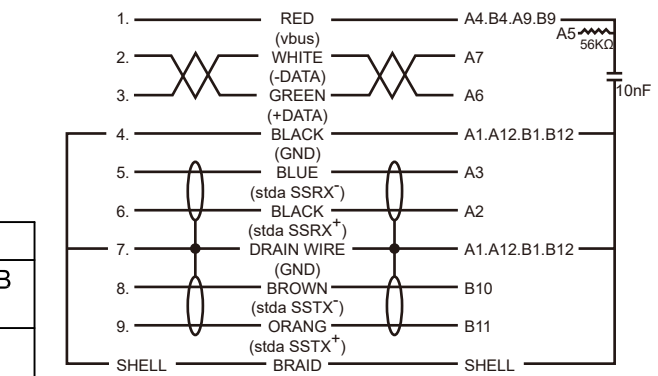

CBL-PU3.1G1SOH-Xm
With short locking screws

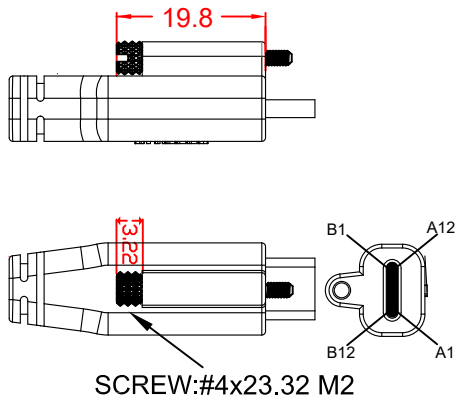

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1SO-Xm				mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY

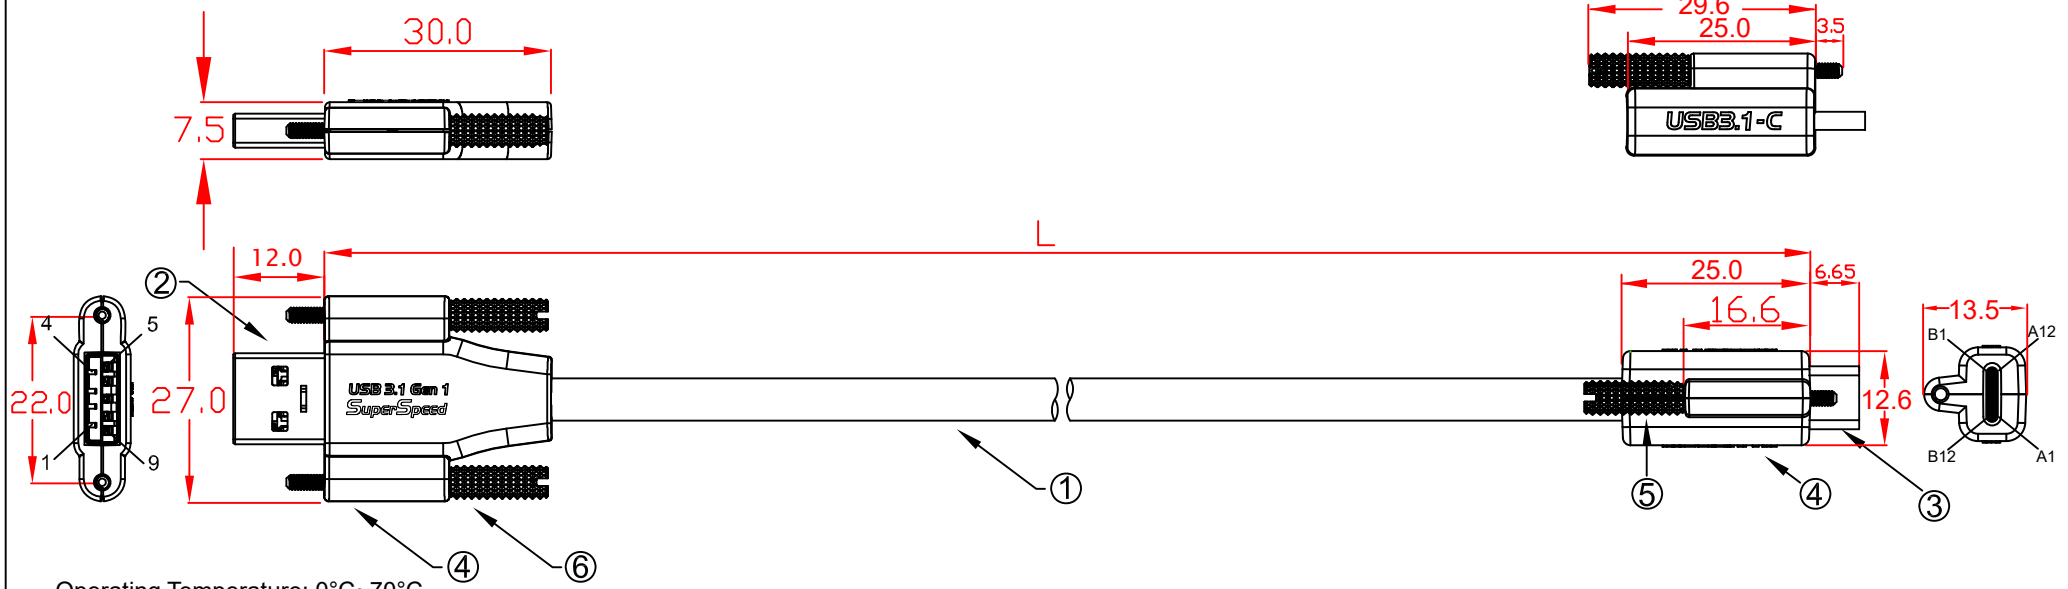

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

L:

CBL-PU3.1G1SO-1m	1000mm±10mm
CBL-PU3.1G1SO-2m	2000mm±20mm
CBL-PU3.1G1SO-3m	3000mm±20mm
CBL-PU3.1G1SO-4m	4000mm±30mm
CBL-PU3.1G1SO-5m	5000mm±30mm

PIN OUT

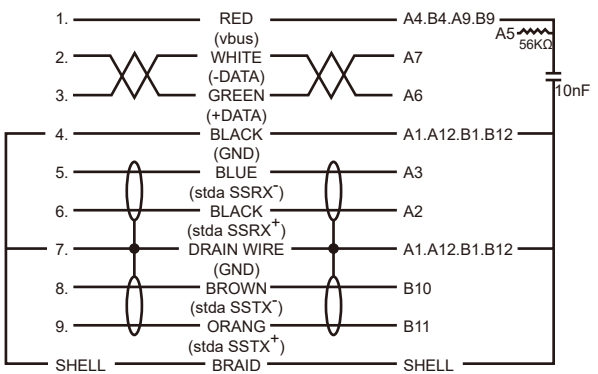

CBL-PU3.1G1SOH-Xm
With short locking screws

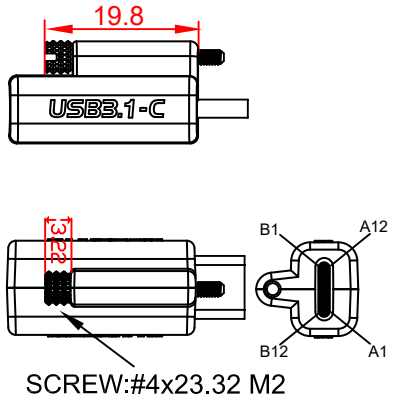

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	ABS HOUSING, BLACK COLOR
5.	SCREW:#4x33 M2
6.	SCREW:#4x34.5 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1SO-Xm				mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY

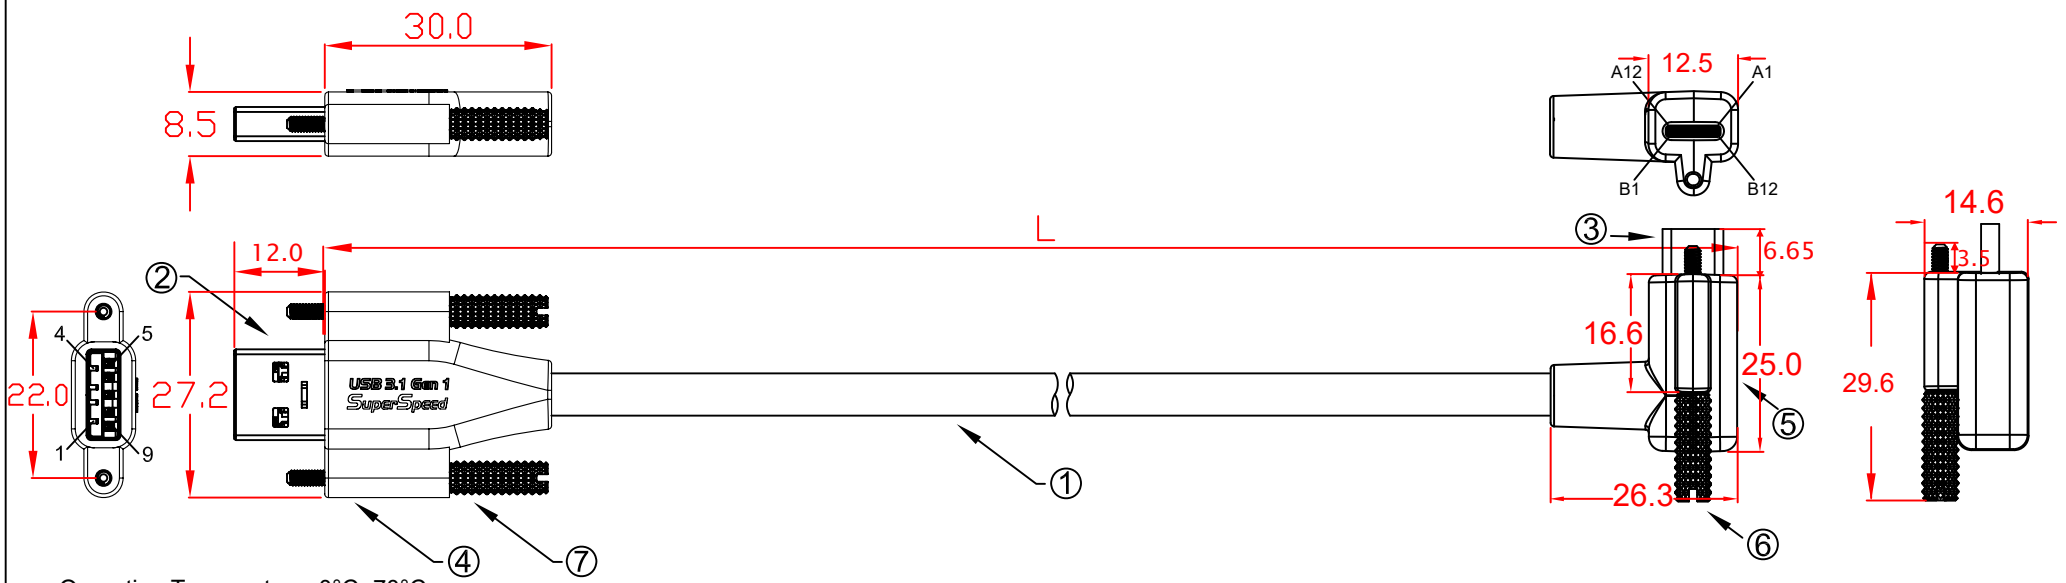

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

L:

CBL-PU3.1G1SO-1mLRA	1000mm±10mm
CBL-PU3.1G1SO-2mLRA	2000mm±20mm
CBL-PU3.1G1SO-3mLRA	3000mm±20mm
CBL-PU3.1G1SO-4mLRA	4000mm±30mm
CBL-PU3.1G1SO-5mLRA	5000mm±30mm

PIN OUT

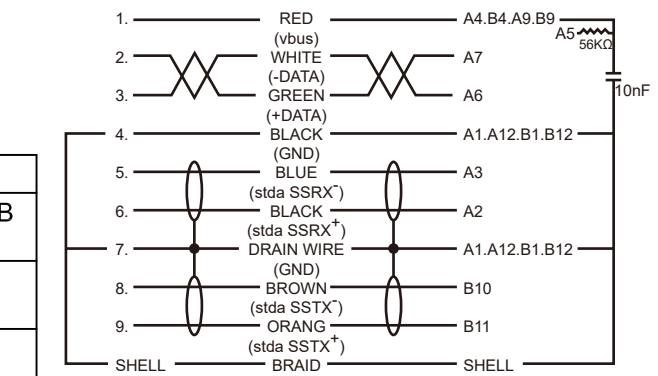

CBL-PU3.1G1SOH-XmLRA
With short locking screws

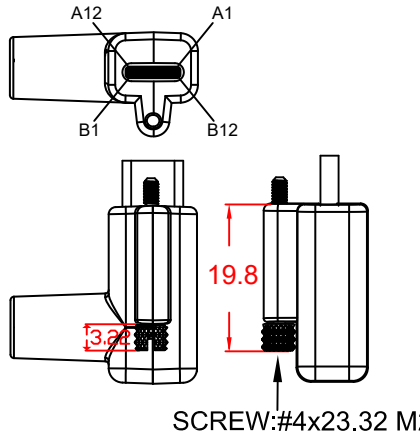

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS ASSEMBLY HOUSING, BLACK COLOR
6.	SCREW:#4x33 M2
7.	SCREW:#4x34.5 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1SO-XmLRA				mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY

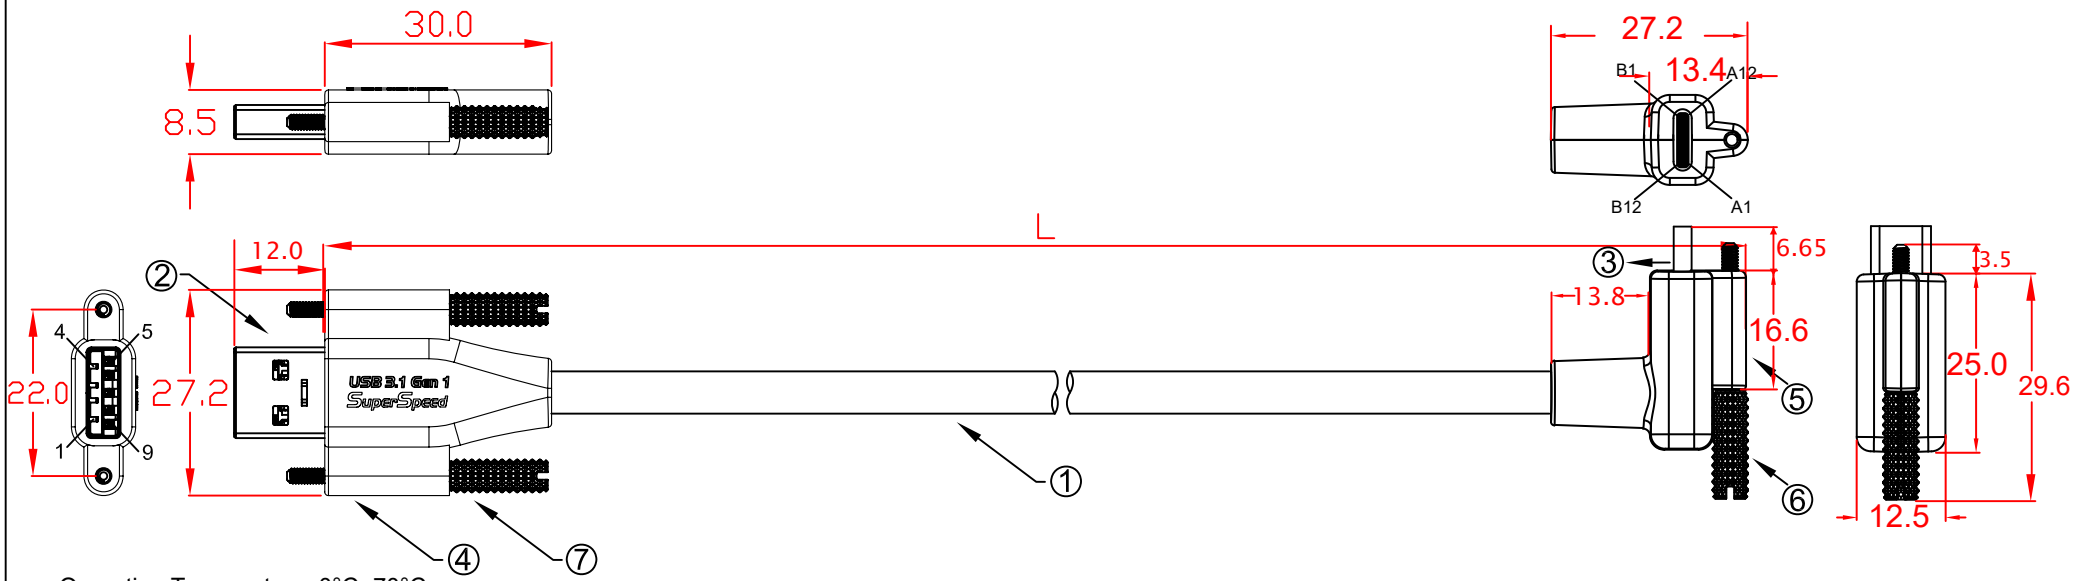

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

L:

CBL-PU3.1G1SO-1mUDA	1000mm±10mm
CBL-PU3.1G1SO-2mUDA	2000mm±20mm
CBL-PU3.1G1SO-3mUDA	3000mm±20mm
CBL-PU3.1G1SO-4mUDA	4000mm±30mm
CBL-PU3.1G1SO-5mUDA	5000mm±30mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS ASSEMBLY HOUSING, BLACK COLOR
6.	SCREW:#4x33 M2
7.	SCREW:#4x34.5 M2

PIN OUT

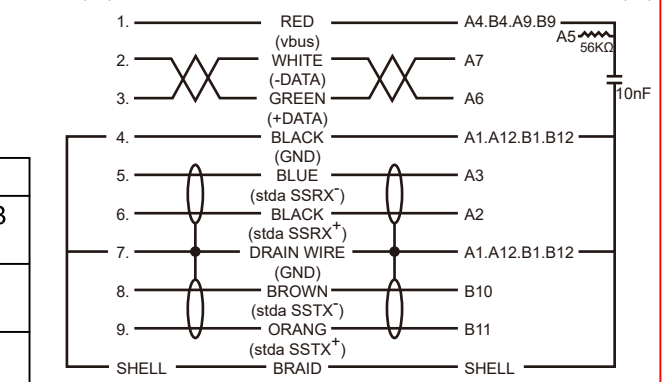

CBL-PU3.1G1SOH-XmUDA
With short locking screws

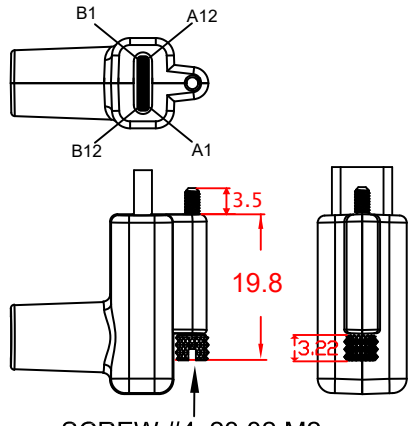

SCREW:#4x23.32 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1SO-XmUDA				mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY