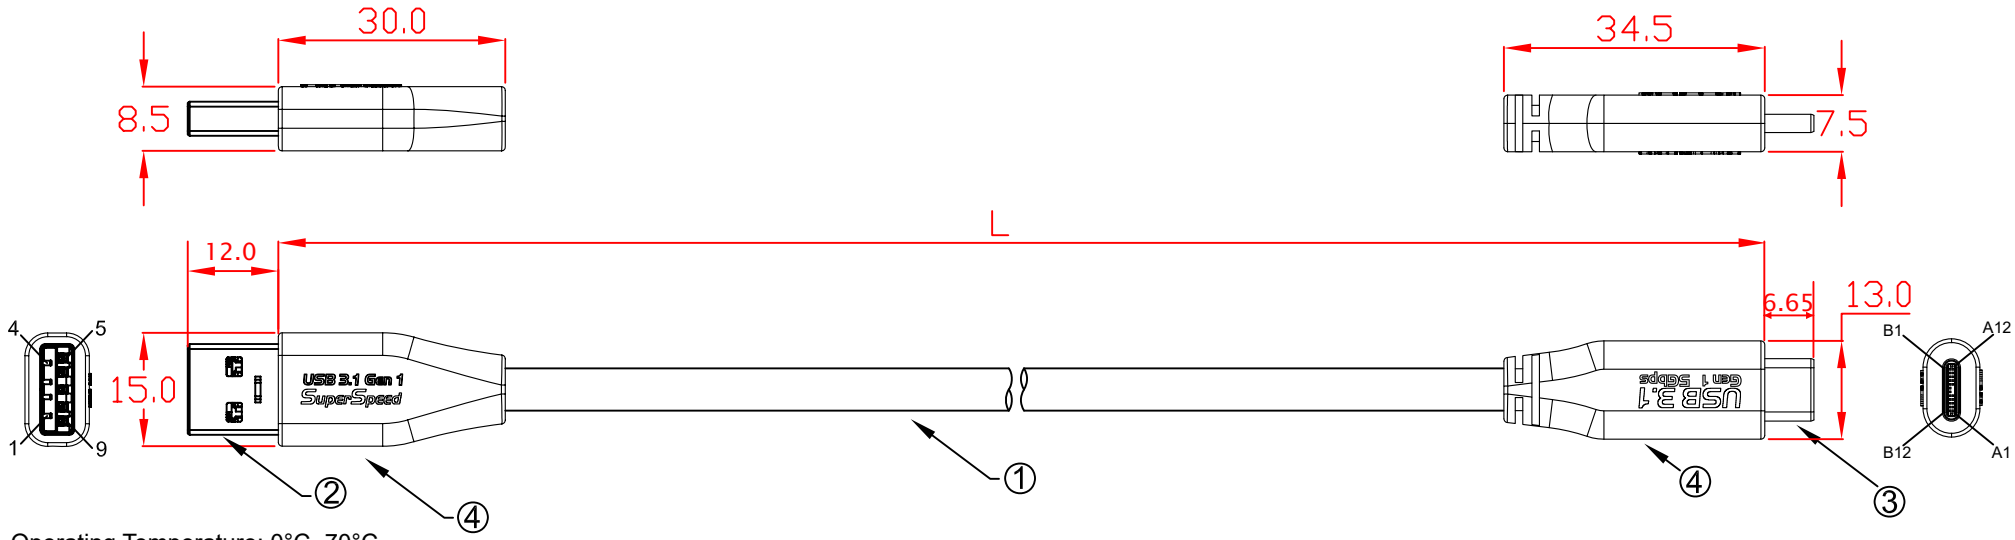

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

PIN OUT

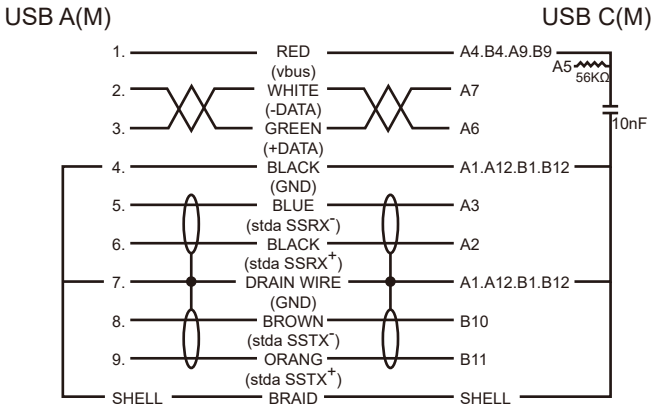

L:

CBL-PU3.1G1XX-1m	1000mm±10mm
CBL-PU3.1G1XX-2m	2000mm±20mm
CBL-PU3.1G1XX-3m	3000mm±20mm
CBL-PU3.1G1XX-4m	4000mm±20mm
CBL-PU3.1G1XX-5m	5000mm±20mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1XX-Xm			1 : 1	mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY

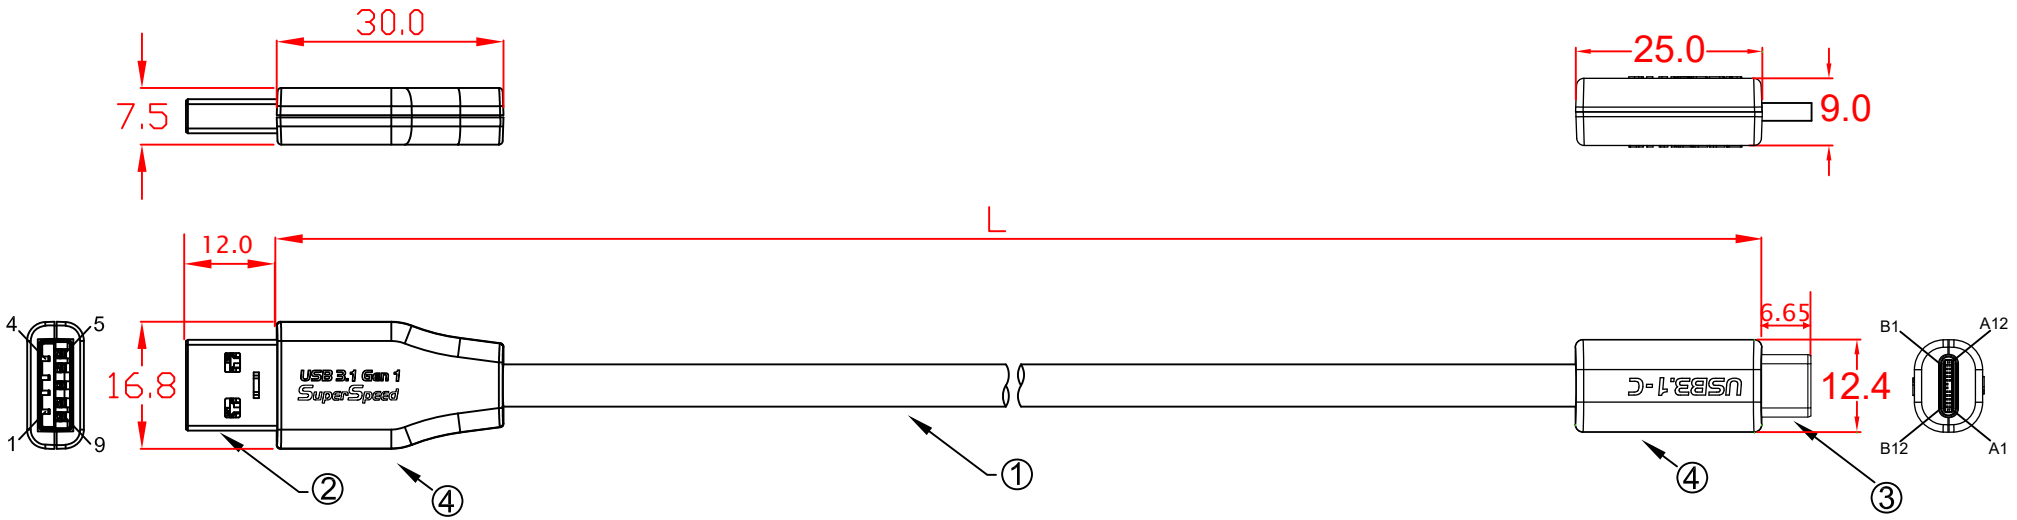

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

PIN OUT

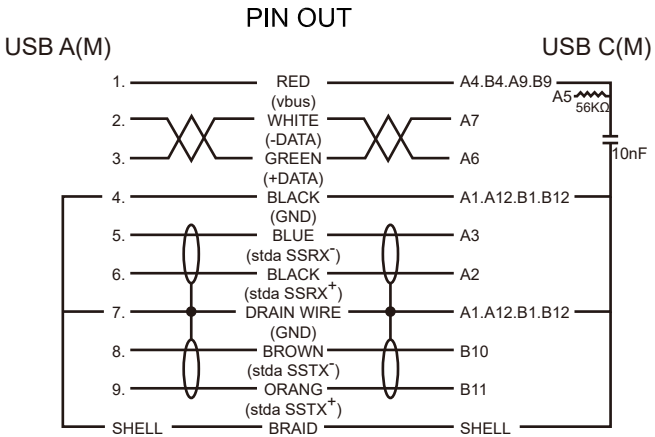

L:

CBL-PU3.1G1XX-1m	1000mm±10mm
CBL-PU3.1G1XX-2m	2000mm±20mm
CBL-PU3.1G1XX-3m	3000mm±20mm
CBL-PU3.1G1XX-4m	4000mm±20mm
CBL-PU3.1G1XX-5m	5000mm±20mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	ABS HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1XX-Xm			1 : 1	mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY

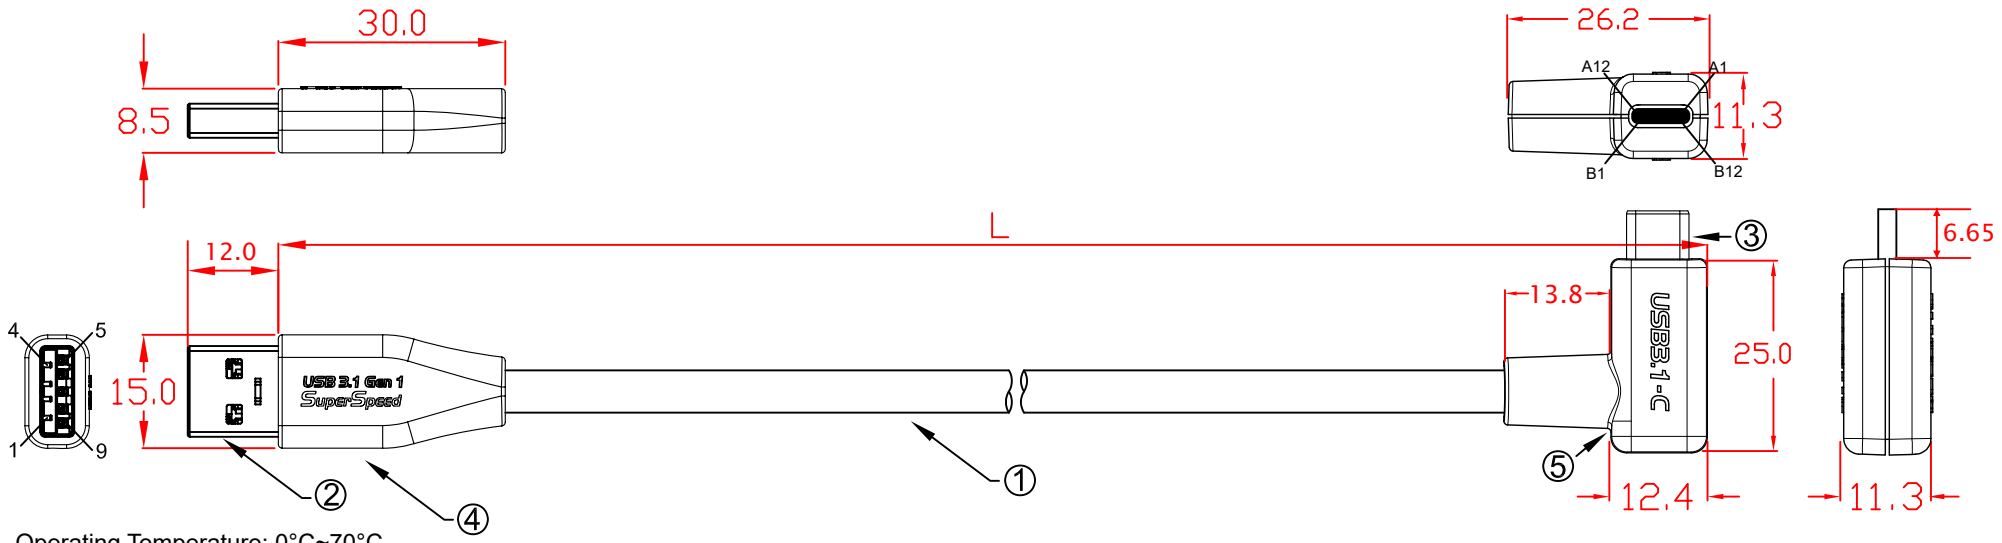

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

PIN OUT

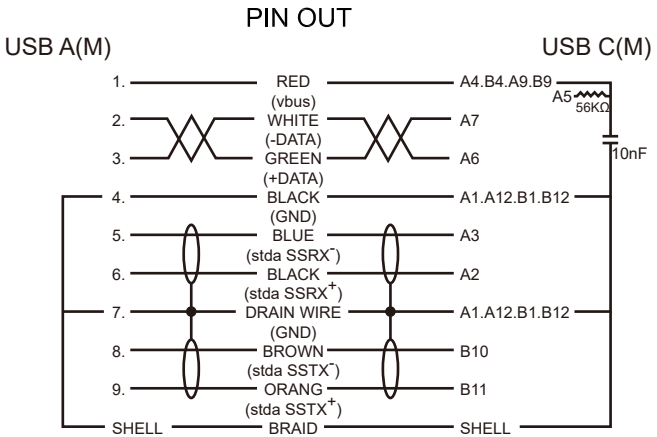

L:

CBL-PU3.1G1XX-1mLRA	1000mm±10mm
CBL-PU3.1G1XX-2mLRA	2000mm±20mm
CBL-PU3.1G1XX-3mLRA	3000mm±20mm
CBL-PU3.1G1XX-4mLRA	4000mm±20mm
CBL-PU3.1G1XX-5mLRA	5000mm±20mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1XX-XmLRA			1 : 1	mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY

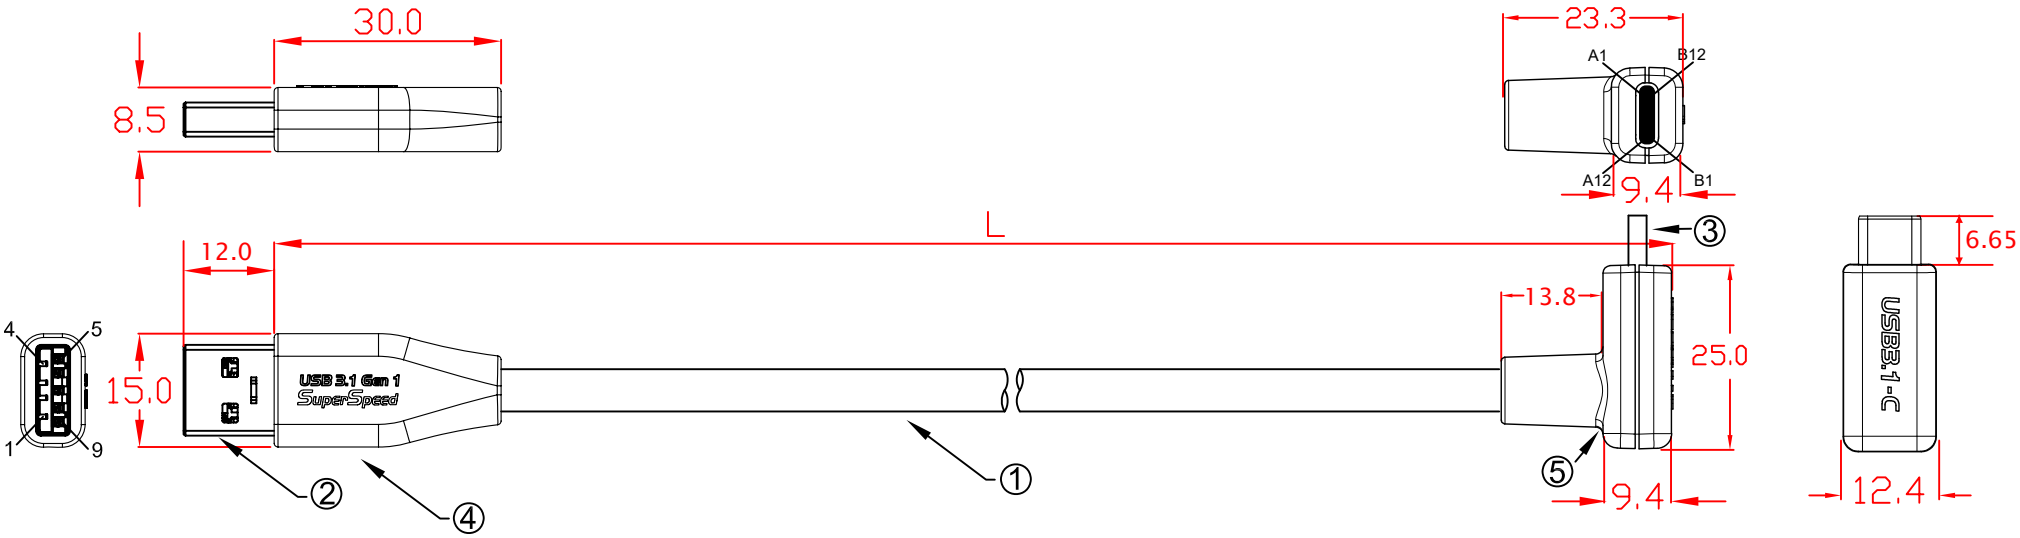

Operating Temperature: 0°C~70°C
Operating Humidity: 20%~80% (no condensation)
Storage Temperature: -25°C~85°C
Storage Humidity: 20%~80% (no condensation)

PIN OUT

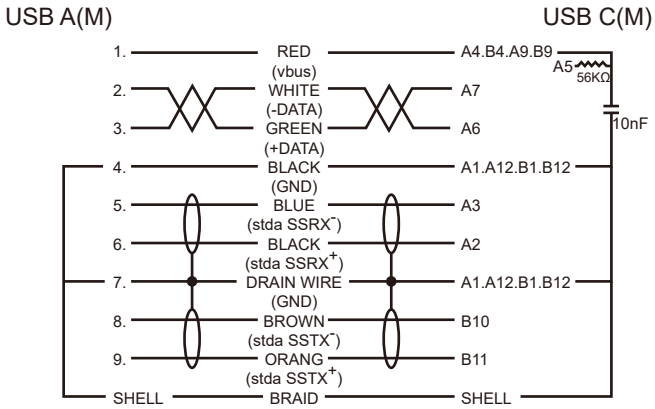

L:

CBL-PU3.1G1XX-1mUDA	1000mm±10mm
CBL-PU3.1G1XX-2mUDA	2000mm±20mm
CBL-PU3.1G1XX-3mUDA	3000mm±20mm
CBL-PU3.1G1XX-4mUDA	4000mm±30mm
CBL-PU3.1G1XX-5mUDA	5000mm±30mm

No	MATERIALS LIST:
1.	CABLE:UL2725 (28AWG*1PR+D+AM)x2C+28AWG*1PR+24AWG*1C+AM+B OD:5.6mm PVC JACKET COLOR:BLACK
2.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
3.	CONNECTOR:USB 3.1 TYPE-C, MALE, NICKEL PLATED SHELL
4.	PVC MOLDED HOUSING, BLACK COLOR
5.	ABS HOUSING, BLACK COLOR

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-PU3.1G1XX-XmUDA			1 : 1	mm
Drawing Name		Drawn	Date	REV.
USB 3.1 GEN 1 A to C M/M				1.0

Mobile Computing JARGY