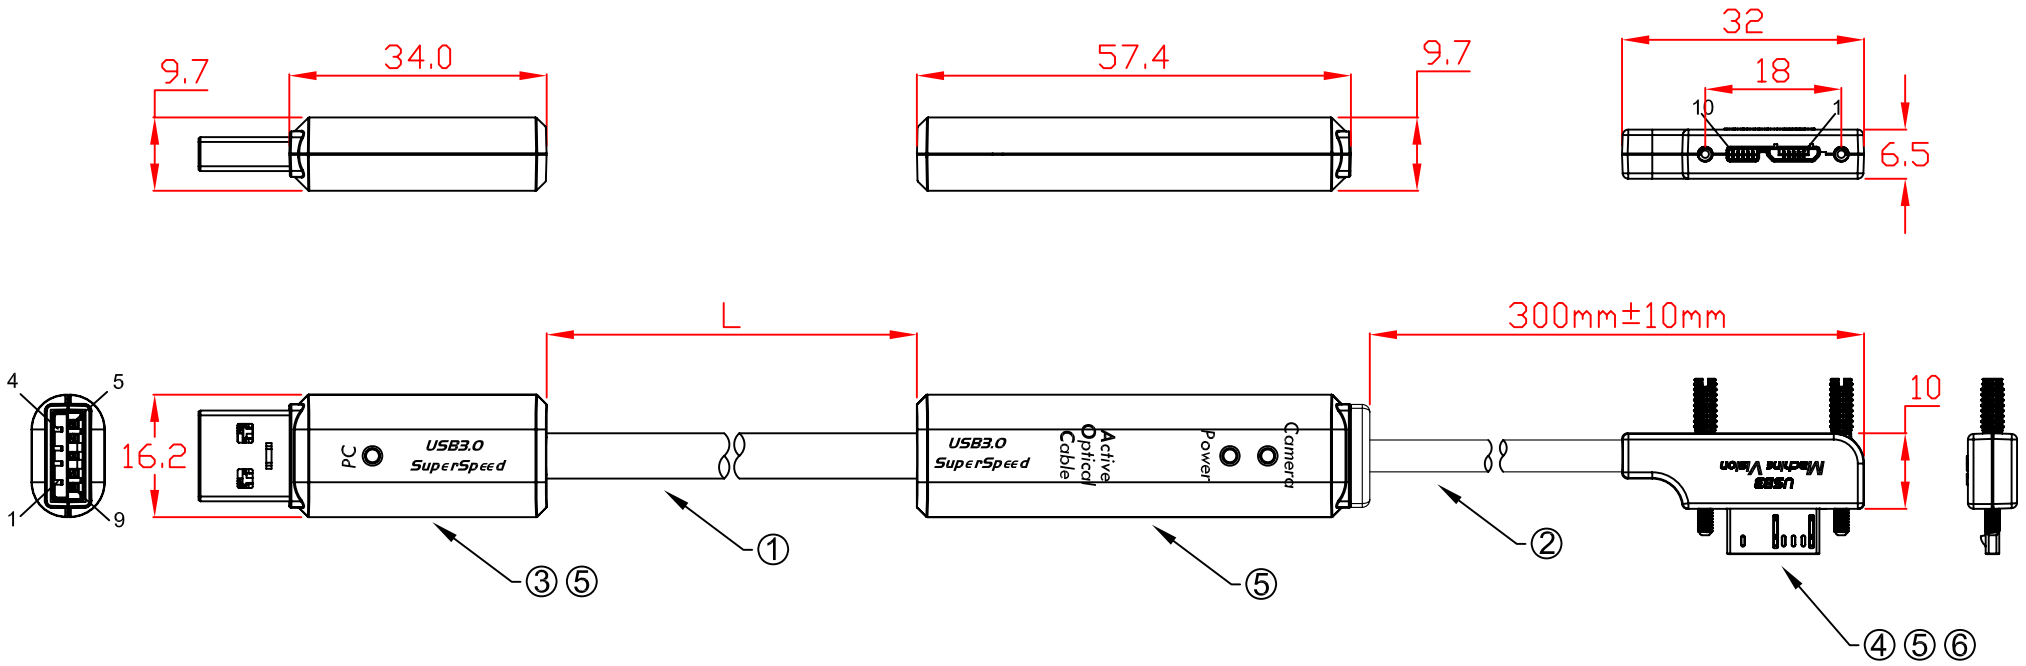

L:

CBL-U3AOC06S-3mRA	3000mm±30mm
CBL-U3AOC06S-5mRA	5000mm±30mm
CBL-U3AOC06S-8mRA	8000mm±50mm
CBL-U3AOC06S-10mRA	10000mm±50mm

No	MATERIALS LIST:
1.	CABLE:2C OPTICAL FIBER + 2C COPPER WIRE COMBINED CABLE OD:6.0mm PVC JACKET COLOR:BLACK
2.	CABLE:UL2725 (32AWG*1PR+D+AM)x2C+32AWG*1PR+24AWG*1C+AM+B OD:4.2mm PVC JACKET COLOR:BLACK
3.	CONNECTOR:USB 3.0 A/M, 9P, BLUE INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
4.	CONNECTOR:USB 3.0 MicroB/M, 10P, BLACK INSULATOR SOLDER TYPE, NICKEL PLATED SHELL
5.	ABS ASSEMBLY HOUSING, BLACK COLOR
6.	SCREW:#3x20.7 M2

Jargy part no.	Client part no.	Approved	SCALE	UNIT
CBL-U3AOC06S-xmRA			1 : 1	mm
Drawing Name		Drawn	Date	REV.
USB 3.0 A to Micro-B Camera Cable M/M		Kevin Hsu	2016/06/20	1.0

Mobile Computing JARGY